

THE BEAM SERIES

(Uniser LED Linear Lights)


PRODUCT OVERVIEW TECHNICAL DOCUMENT

UNISER LED LINEAR LIGHTS – BEAM SERIES



The Uniser Beam series elegantly crafts style and efficiency in a Linear Light lending a bespoke personality to any space it resides in.

APPLICATION PICTURES

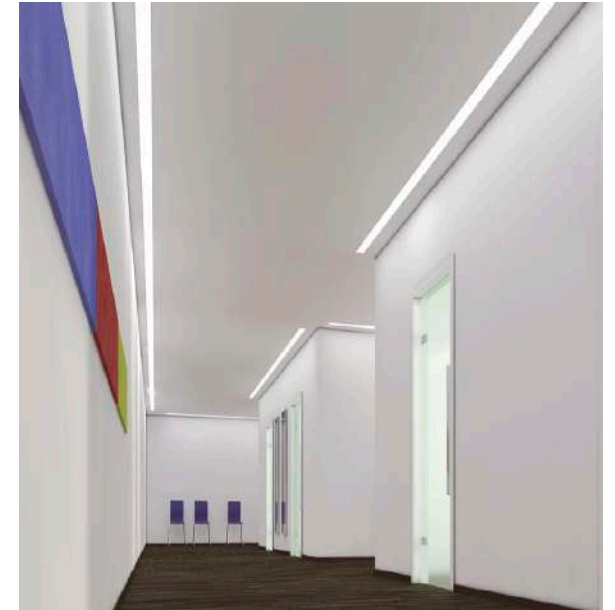

CUSTOMISED APPLICATION




CUSTOMISED APPLICATION



BEAM_6538


BEAM_6538	
Model Name	UNI-Linear-Recessed
Dimensions (mm)	W:65mm H:38mm
Body Colour	White/Anodised Silver /Black
Visor	Diffused, Deco Satin Finish, Optical Grade Polycarbonate
Housing	Extruded Aluminum (Powder Coated to White/Black)
Driver	Osram or Fulham Driver
LED	BridgeLux or Osram LED mounted on rigid PCB
CCT	3000K 4000K 5700K CRI >80 IP: 40
Mounting Type	Spring-Clamp Recessed Mounting
Wattage & Corresponding lengths	Customization possible

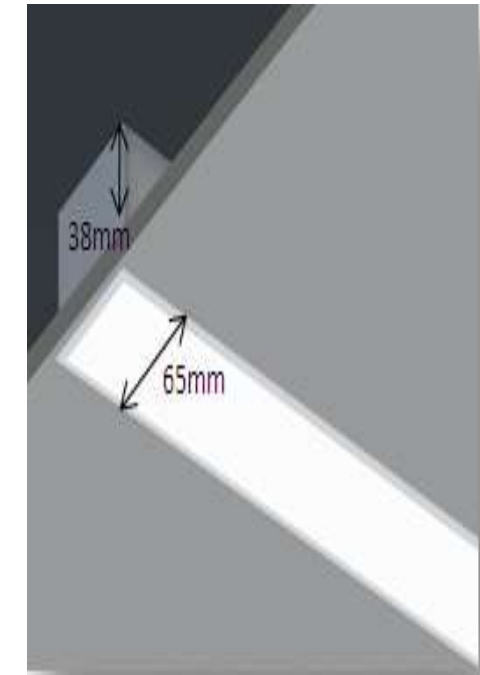

2 feet	15watt
3 feet	22watt
4 feet	28watt
5 feet	38watt
6 feet	44watt
7 feet	50watt
8 feet	56 watt

BEAM_9083


BEAM_9083	
Model Name	UNI-Linear-Recessed
Dimensions (mm)	W:90mm H:83mm
Body Colour	White/Anodised Silver /Black
Visor	Diffused, Deco Satin Finish, Optical Grade Polycarbonate
Housing	Extruded Aluminum (Powder Coated to White/Black)
Driver	Osram or Fulham Driver
LED	BridgeLux or Osram LED mounted on rigid PCB
CCT	3000K 4000K 5700K CRI >80 IP: 40
Mounting Type	Toggle Fiting Recessed Mounting
Wattage & Corresponding lengths	Customization possible

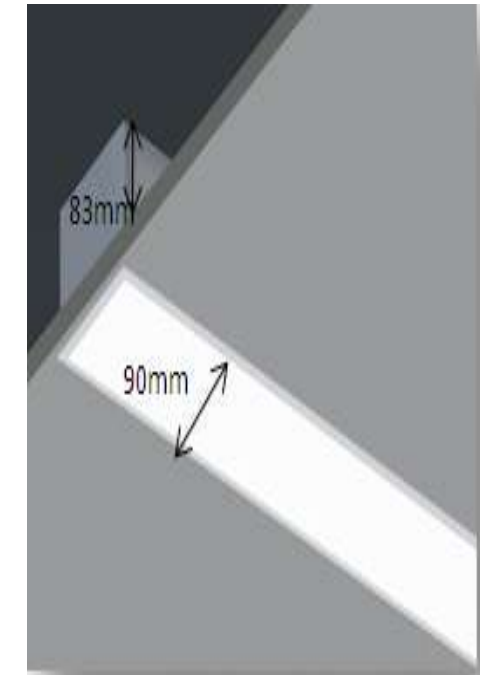

2 feet	15watt
3 feet	23watt
4 feet	30watt
5 feet	38watt
6 feet	45watt
7 feet	53watt
8 feet	60 watt

BEAM_7490


BEAM_7490	
Model Name	UNI-Linear-Suspended
Dimensions (mm)	W:74mm H:90mm
Body Colour	White/Anodised Silver /Black
Visor	Diffused, Deco Satin Finish, Optical Grade Polycarbonate
Housing	Extruded Aluminum (Powder Coated to White/Black)
Driver	Osram or Fulham Driver
LED	BridgeLux or Osram LED mounted on rigid PCB
CCT	3000K 4000K 5700K CRI >80 IP: 40
Mounting Type	Surface Mounted or Suspended
Wattage & Corresponding lengths	Customization possible

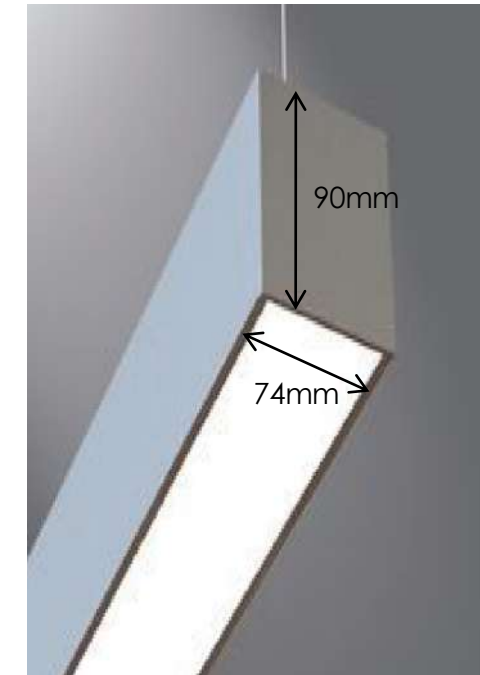

2 feet	15watt
3 feet	22watt
4 feet	28watt
5 feet	38watt
6 feet	44watt
7 feet	50watt
8 feet	56 watt

BEAM_5272

BEAM_5272	
Model Name	UNI-Linear-Suspended
Dimensions (mm)	W:52mm H:72mm
Body Colour	White/Anodised Silver /Black
Visor	Diffused, Deco Satin Finish, Optical Grade Polycarbonate
Housing	Extruded Aluminum (Powder Coated to White/Black)
Driver	Osram or Fulham Driver
LED	BridgeLux or Osram LED mounted on rigid PCB
CCT	3000K 4000K 5700K CRI >80 IP: 40
Mounting Type	Surface Mounted or Suspended
Wattage & Corresponding lengths	Customization possible

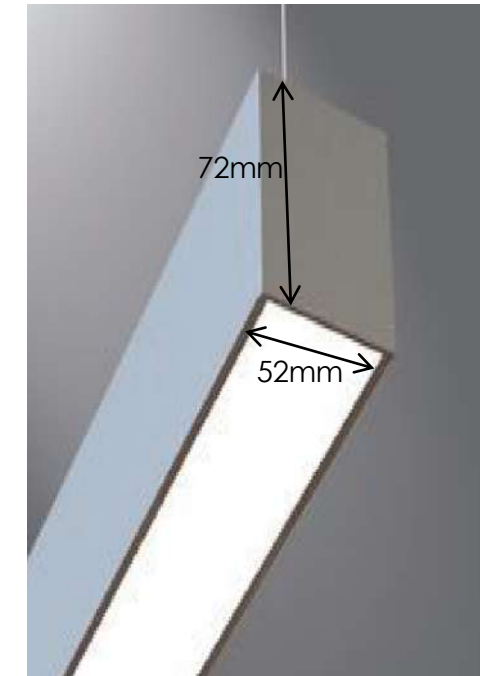

2 feet	15watt
3 feet	23watt
4 feet	30watt
5 feet	38watt
6 feet	45watt
7 feet	53watt
8 feet	60 watt

CONTACT US

To place your order, please contact

Uniser Industries Pvt. Ltd.

HELPDESK DETAILS :

414, Lotus House, 33-A V Thackersey Marg,
New Marine Lines, Mumbai 400020, India

Tel: 022 22000515

Mob : +91 9867625686

www.uniserledlights.com

Email : projects@uniserledlights.com | sureshmadhavan@uniserledlights.com