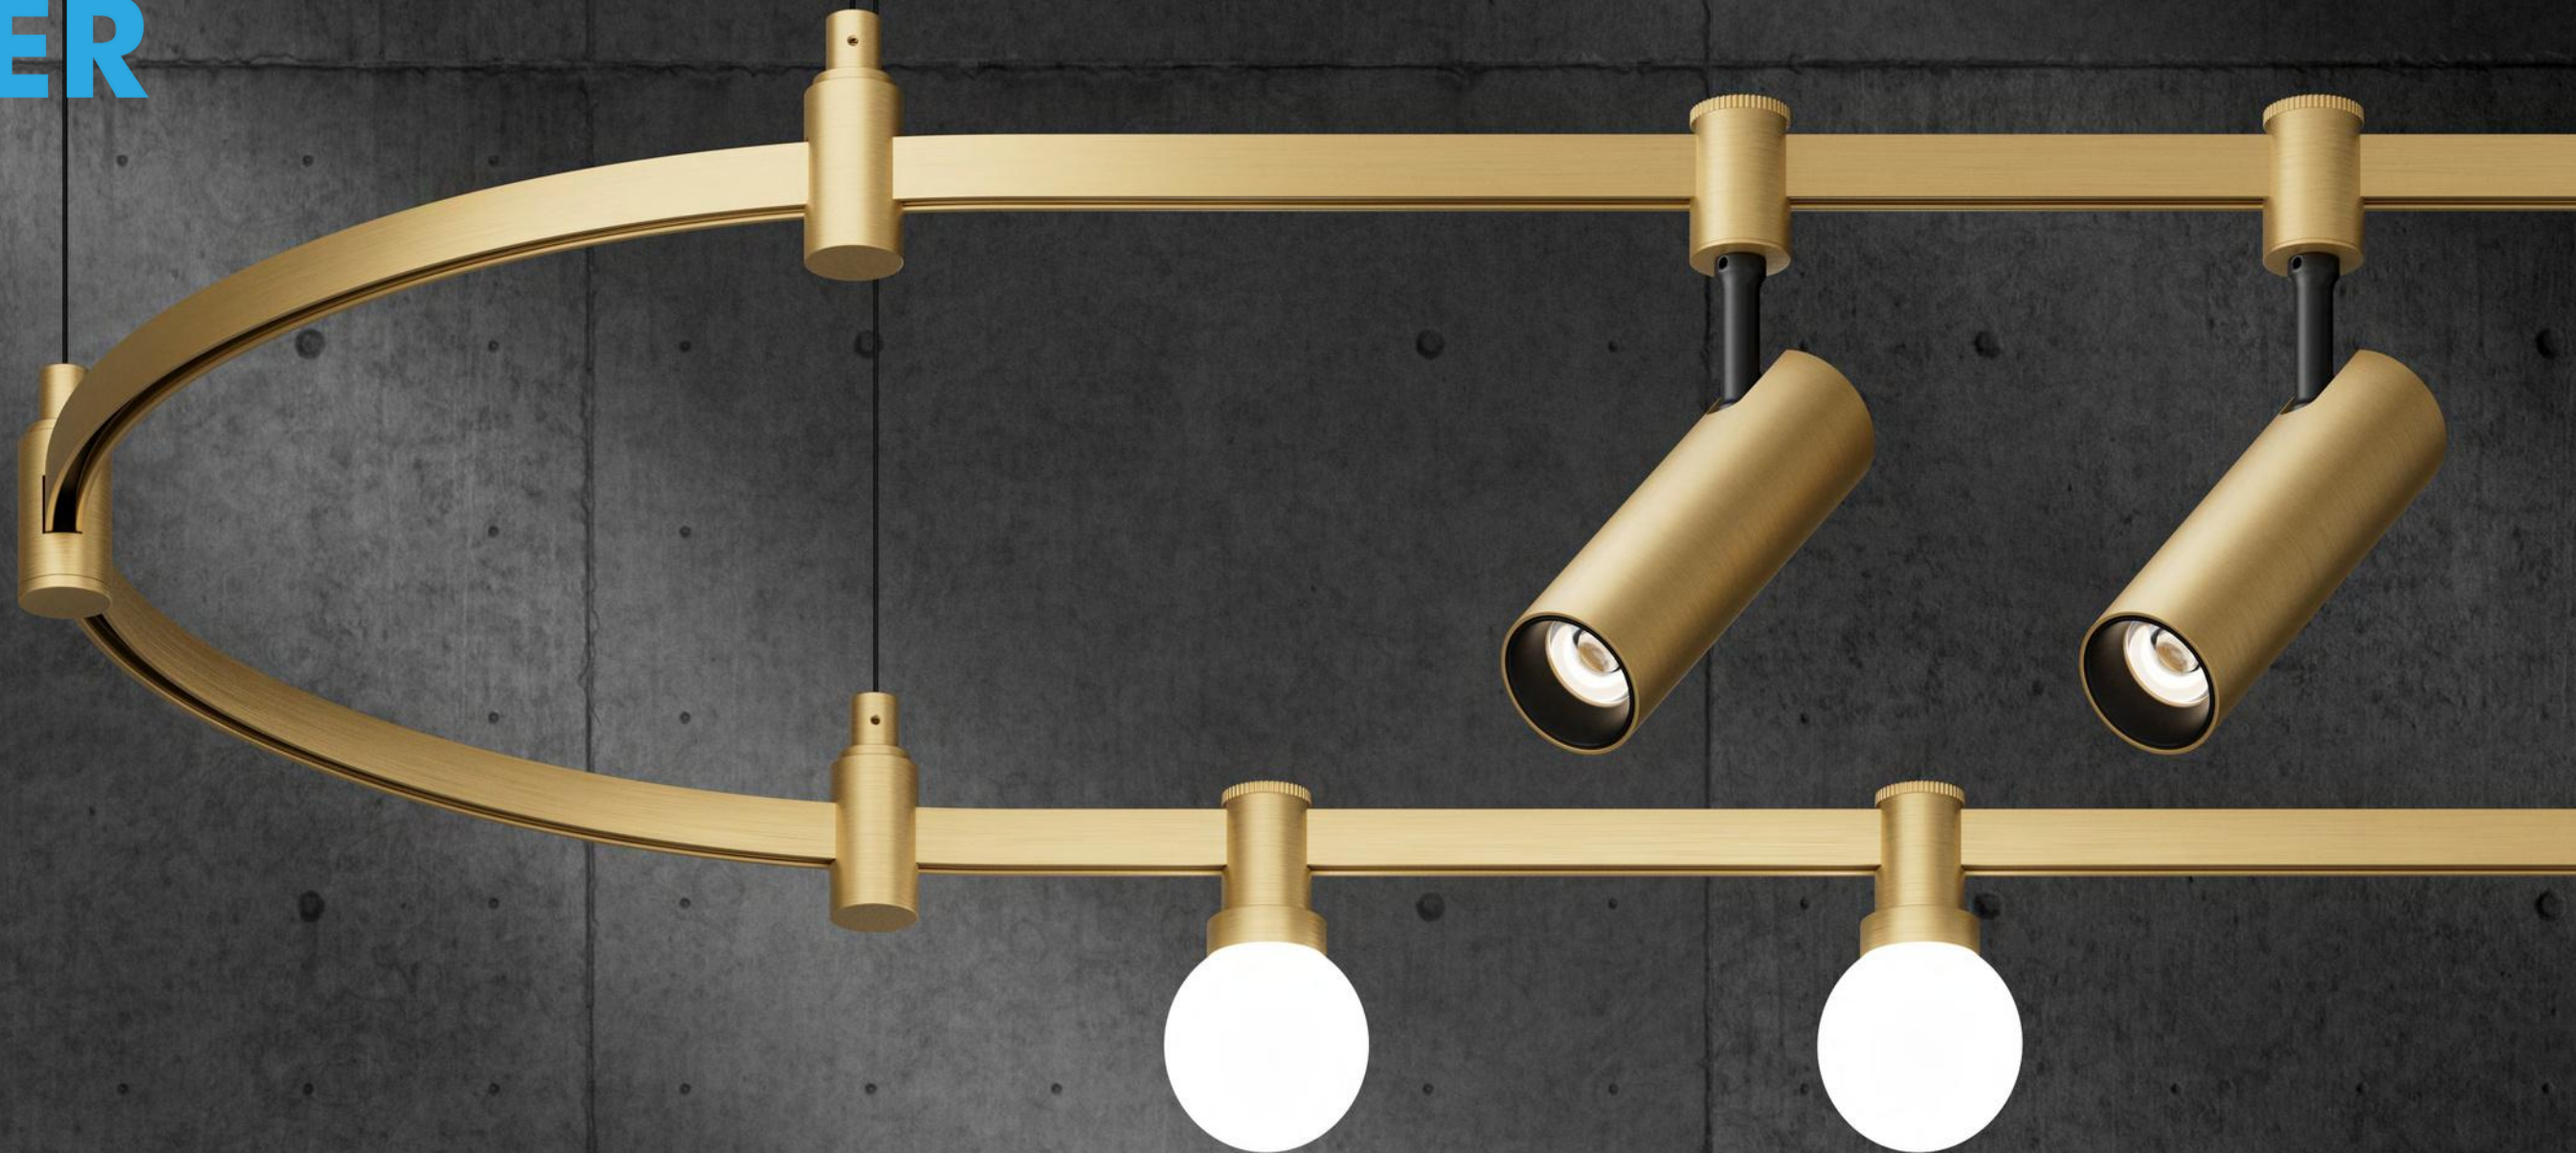


UNISER



CONNEKT-TRACK
SERIES


UNISER



CONNEKT- TRACK SERIES

DC48V
SYSTEM

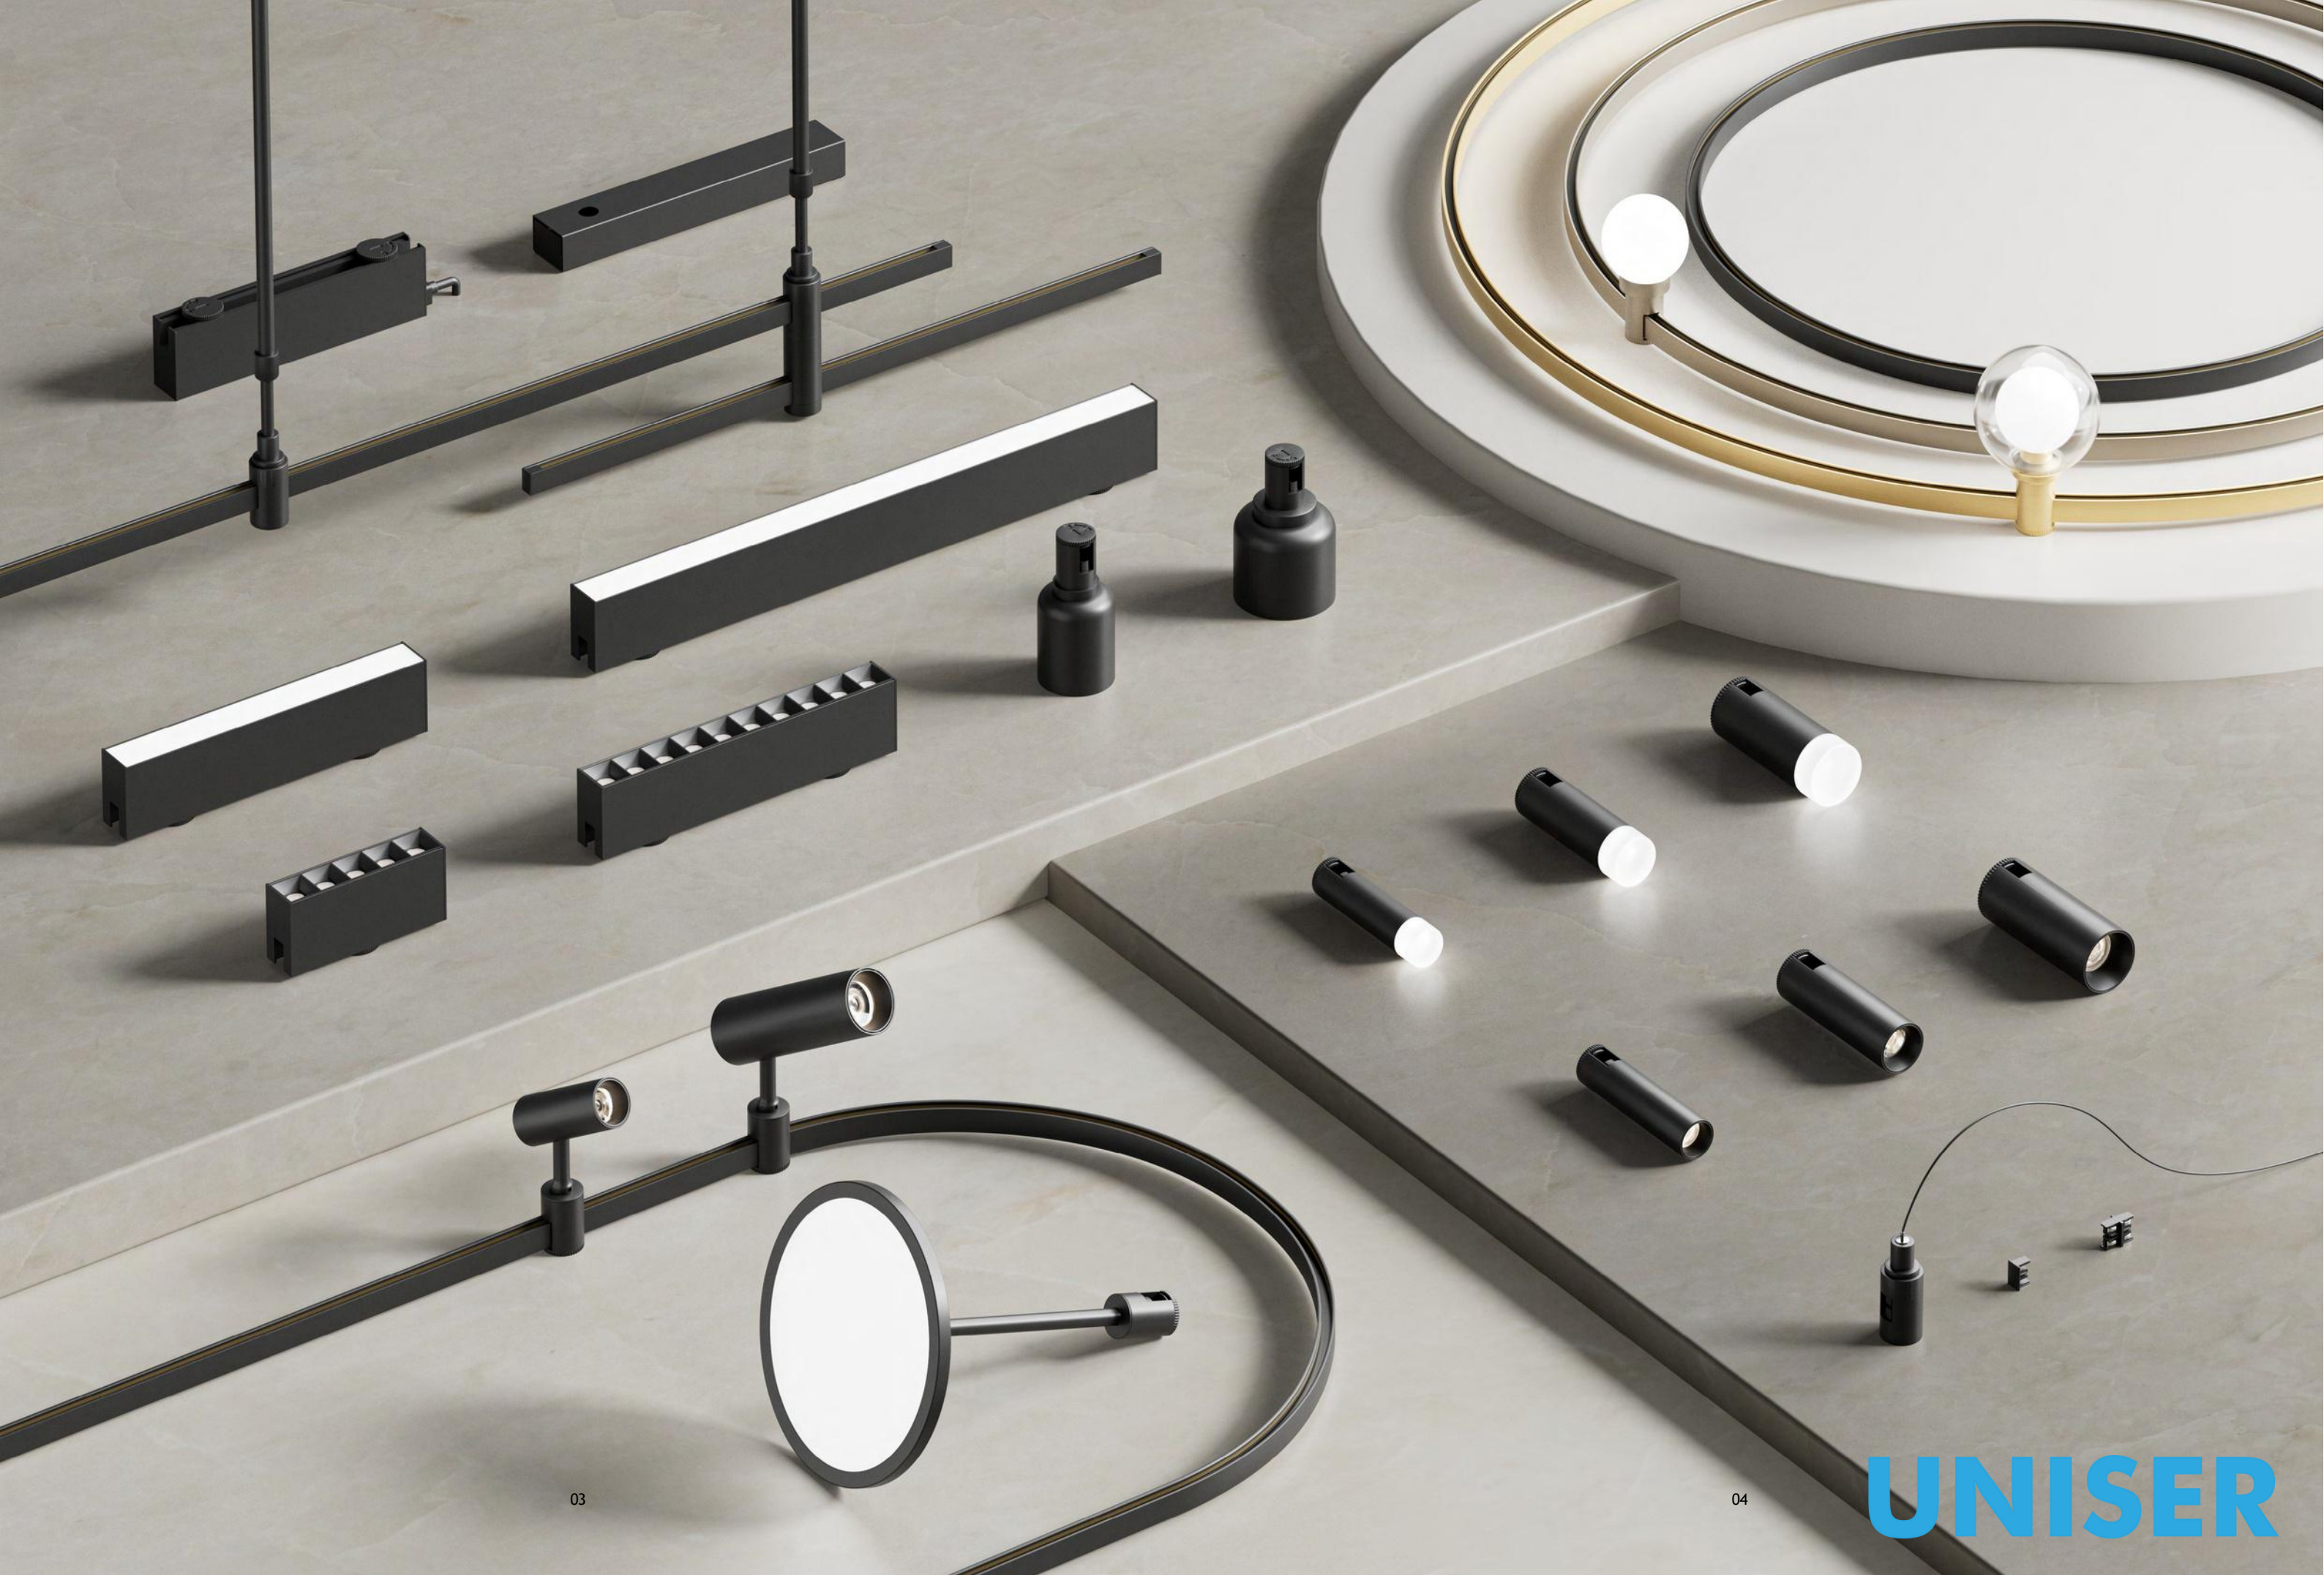The low voltage track system can easily applied to match with down lights, spotlights, linear lights and decorative lights, Offers flexibility and freedoms for variable lamps and design. Suitable for whole space lighting or accent lighting and decorative lighting all can apply in a handy way.



STRAIGHT TRACKS

The straight track has single-layer and double-layer track designs, and there are different sizes for you to choose from. There are three different power installation methods, You can bridge and move tracks between tracks according to your needs, providing flexible design for large-span space lighting.

Length of the Pole:
300mm+300mm/500mm+500mm/750mm+750mm/1000mm+1000mm



POWER INSTALLATION METHOD



Power Supply On-Track



External Power Supply



Embedded Power Supply

UNISER

CIRCULAR ARC TRACKS

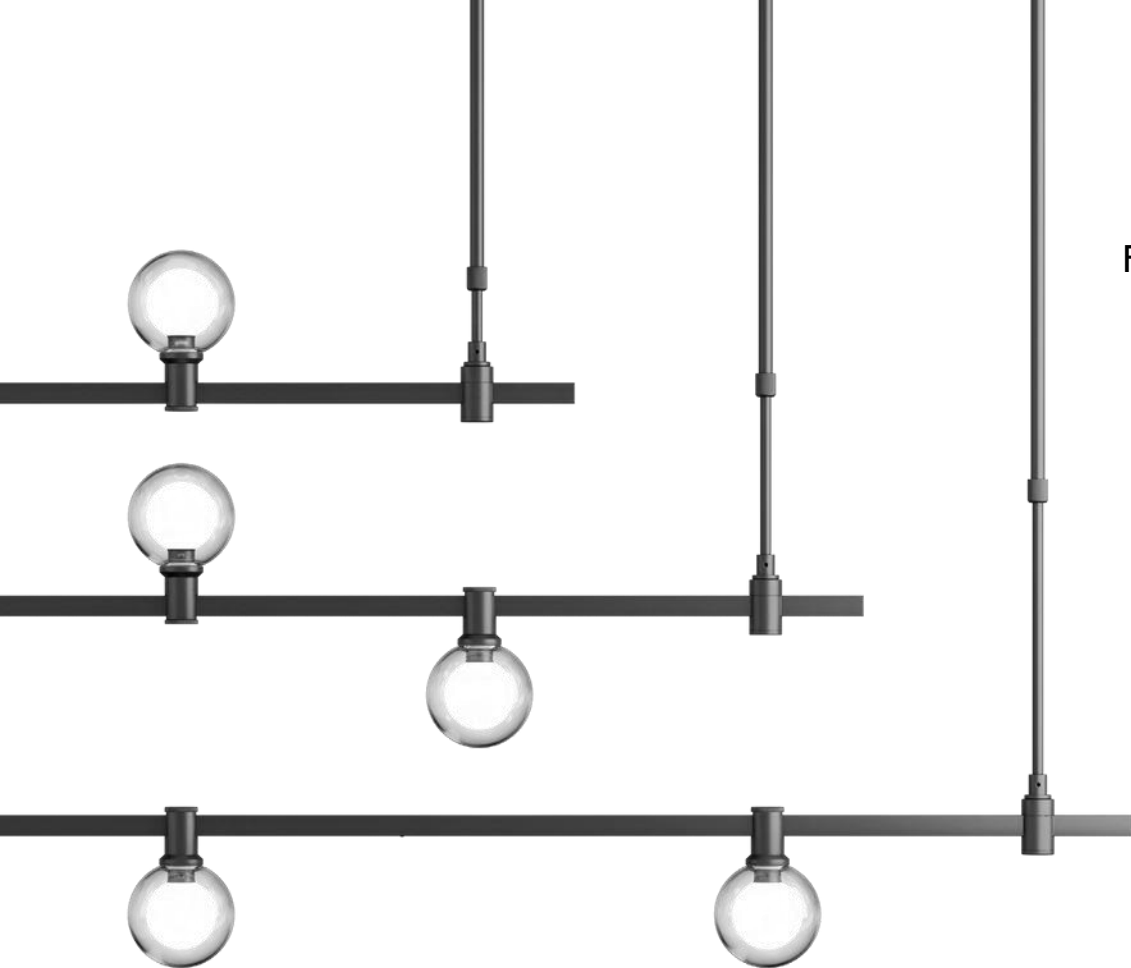
There are various diameter specifications available for the circular arc track: $\Phi 600\text{mm}$ / $\Phi 800\text{mm}$ / $\Phi 1000\text{mm}$ / $\Phi 1500\text{mm}$ / $\Phi 2000\text{mm}$.

It is suitable for different types of ceilings, creating a spacious and fashionable space, and can create more different shapes according to your needs. the diameter and the circular, square or rectangular shape.

POWER INSTALLATION METHOD



The CT-PL200 product can be freely transferred



FREE INSTALLATION

Install upwards

Install it up and down

Install downward

QUICK INSTALLATION



Rotating buckle, with magnets on the lamp joint to prevent the lamp from falling off easily, making it safer and more reliable.

48V low voltage power supply with safety performance, can be directly touched, or easily slide into any position on the track according to the different needs of space



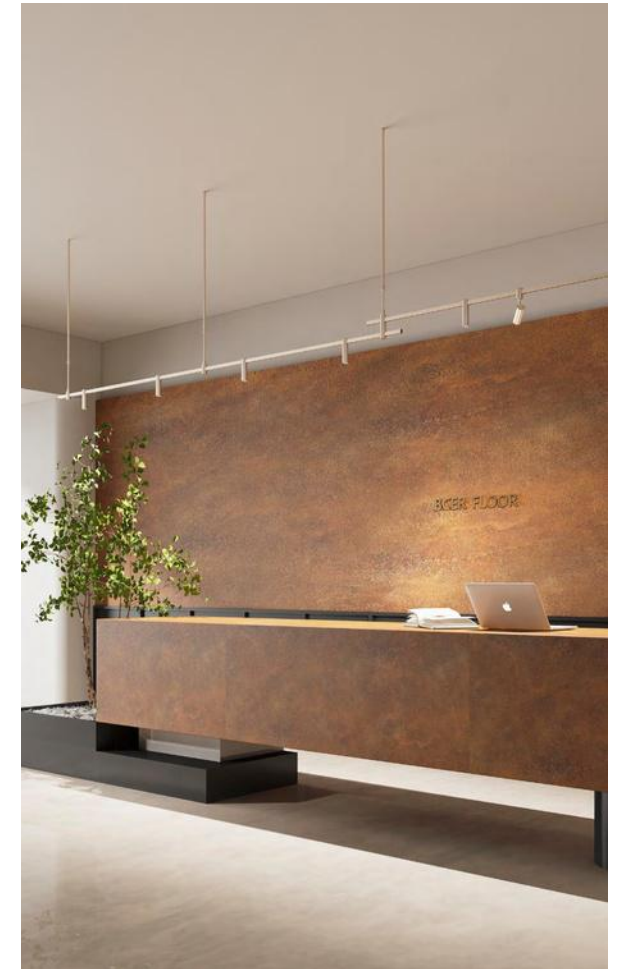
MULTIPLE COLORS AVAILABLE

There are three colors to choose from for the track: black, gold, and nickel. According to the different needs of the space, match them to create your own unique style



WORKWEAR SCENARIO

Suitable for workwear scenarios such as restaurants, bars, and front desk.





HOME DECORATION SCENE

Suitable for home decoration scenarios such as living room, study, and dining table at home.



STRAIGHT TRACK



Model NO.	UHLS-TrackX
Material	Aluminum+Copper+Iron
Color	Black/Golden
Length	1000mm/2000mm/2500mm


Model NO.	UHLS-ZJ1	UHLS-ED1
Material	Copper+PC	PC
Color	Black/Golden	Black/Golden
Function	Connector	End Cap

Model NO.	UHLS-Track-RX
Material	Aluminum+Copper+Iron
Color	Black/Golden
Dimension	Φ600mm/Φ800mm/Φ1000mm

Model NO.	UHLS-Track-XRX
Material	Aluminum+Copper+Iron
Color	Black/Golden
Dimension	Φ1500mm/Φ2000mm




UNISER




*X=Length Of The Track

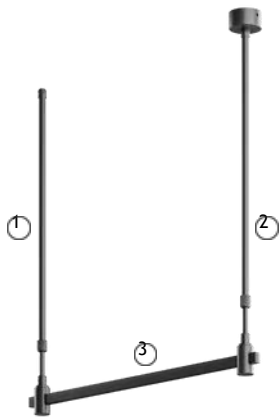ACCESSORIES



Single-layer tracks

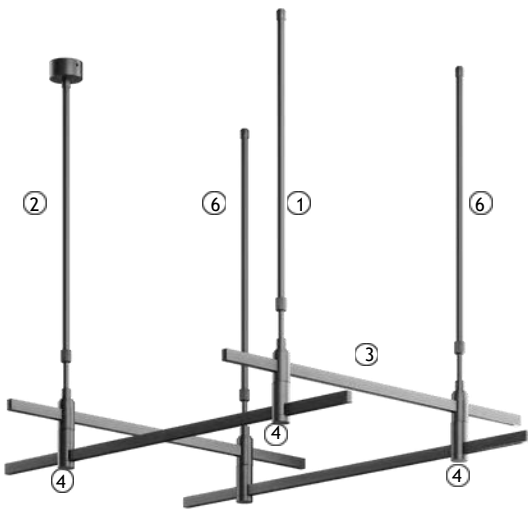

Double-decker tracks

Model NO.
illustrate

Model NO.
illustrate

Model NO.
illustrate



UHLS-HDXXX
Holder With Suspender



UHLS-FDXXX
Feeder With Suspender
and Cable



UHLS-Track
/



UHLS-FD2
Double Layer 360° Connector
With Conductor



UHLS-HD2
Double Layer 360° Holder
Without



UHLS-CDXXX
Connector With Suspender
Without Cable

*XXX=Length Of The Pole:300mm+300mm/500mm+500mm
750mm+750mm/1000mm+1000mm

ARC TRACK

POWER SUPPLY



External Power Supply



Power Supply On-Track

Model NO.	Model NO. UHLS-Track-RX
Rated Power	100W/200W
Body size	L240xW35xH60mm
Input voltage	AC180~255V
Working voltage	DC48V
Operating Current	100W Max.2100mA 200W Max.4200mA
Frequency	50/60Hz
Power factor	≥0.4
Driver efficiency	> 80%
Dimmable	No dimming
Life Time	≥30000hrs
IP Grade	IP20
Protection	Over current protection-OCP 2.7A Thermal protection-OHP (> 150 °C) Surge protection-OVP (AC2000V 10s) Flickers free Form -10°C to 40°C
Working Temperature	Aluminum
Body Material	

Model NO.	Model NO. UHLS-Track-XRX
Rated Power	100W/200W
Body size	L240xW35xH60mm
Input voltage	AC180~255V
Working voltage	DC48V
Operating Current	100W Max.2100mA 200W Max.4200mA
Frequency	50/60Hz
Power factor	≥0.4
Driver efficiency	> 80%
Dimmable	No dimming
Life Time	≥30000hrs
IP Grade	IP20
Protection	Over current protection-OCP 2.7A Thermal protection-OHP (> 150 °C) Surge protection-OVP (AC2000V 10s) Flickers free Form -10°C to 40°C
Working Temperature	Aluminum
Body Material	

PRODUCT INFORMATION


			
Model NO.	UHLS-D30	UHLS-D40	UHLS-D50
Power CCT	7W	12W	18W
Voltage CRI	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
Beam Angle	DC48V >90°	DC48V >90°	DC48V >90°
Material	15°/24°/36°/60°	15°/24°/36°/60°	15°/24°/36°/60°
Color	Aluminum	Aluminum	Aluminum
Life	Black/Golden	Black/Golden	Black/Golden
Warranty	30 000H	30 000H	30 000H
	3 Years	3 Years	3 Years

Dimendions(mm)			
	125 Φ30	125 Φ40	125 Φ50


			
Model NO.	UHLS-D30A	UHLS-D40A	UHLS-D50A
Power CCT	4W	7W	12W
Voltage CRI	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
Beam Angle	DC48V >90°	DC48V >90°	DC48V >90°
Material	105°	105°	105°
Color	Arclic	Arclic	Arclic
Life	Black/Golden	Black/Golden	Black/Golden
Warranty	30 000H	30 000H	30 000H
	3 Years	3 Years	3 Years

Dimendions(mm)			
	125 Φ30 20	125 Φ40 20	125 Φ50 20








		
Model NO.	UHLS-TL7	UHLS-TL12
Power CCT	7W	12W
Voltage CRI	3000K/4000K/5000K	3000K/4000K/5000K
Beam Angle	DC48V >90°	DC48V >90°
Material	15°/24°/36°/60°	15°/24°/36°/60°
Color	Aluminum	Aluminum
Life	Black/Golden	Black/Golden
Warranty	30 000H	30 000H
	3 Years	3 Years

Dimendions(mm)		
	161 90 Φ36	221 150 Φ48

		
Model NO.	UHLS-X60	UHLS-X80
Power CCT	12W	18W
Voltage CRI	3000K/4000K/5000K	3000K/4000K/5000K
Beam Angle	DC48V >90°	DC48V >90°
Material	15°/24°/36°/60°	15°/24°/36°/60°
Color	Aluminum	Aluminum
Life	Black/Golden	Black/Golden
Warranty	30 000H	30 000H
	3 Years	3 Years

Dimendions(mm)		
	125 Φ60	125 Φ80

PRODUCT INFORMATION

Model NO. Power CCT Voltage CRI Beam Angle Material Color Life Warranty		UHLS-LB5 10W 3000K/4000K/5000K DC48V >90° 30° Aluminum Black/Golden 30 000H 3 Years		UHLS-LB10 20W 3000K/4000K/5000K DC48V >90° 30° Aluminum Black/Golden 30 000H 3 Years	Model NO. Power CCT Voltage CRI Beam Angle Material Color Life Warranty		UHLS-G100 4W 3000K/4000K/5000K DC48V >90° 110° Aluminum+Glass Black/Golden 30 000H 3 Years		UHLS-R70 4W 3000K/4000K/5000K DC48V >90° 70° Aluminum+Arclic Black/Golden 30 000H 3 Years
	Dimendions(mm)					Dimendions(mm)			
		UHLS-DF265 12W 3000K/4000K/5000K DC48V >90° 105° Aluminum Black/Golden 30 000H 3 Years		UHLS-DF530 24W 3000K/4000K/5000K DC48V >90° 105° Aluminum Black/Golden 30 000H 3 Years	Model NO. Power CCT Voltage CRI Beam Angle Material Color Life Warranty		UHLS-PL200 15W 3000K/4000K/5000K DC48V >90° 110° Aluminum+PC+Arclic Black/Golden 30 000H 3 Years		
	Dimendions(mm)					Dimendions(mm)			

UNISER

 414, Lotus House, 33-A, V Thackersey Marg, New Marine Lines,
Mumbai 400020, India

 +91-22-22000515 | +91-9867625686

 support@unisersmartspaces.com

 www.unisersmartspaces.com