

**UNISER**  
INDUSTRIES PVT. LTD.


# OUTDOOR SERIES



Outdoor Series

# UNISER


POWERED BY CREE 

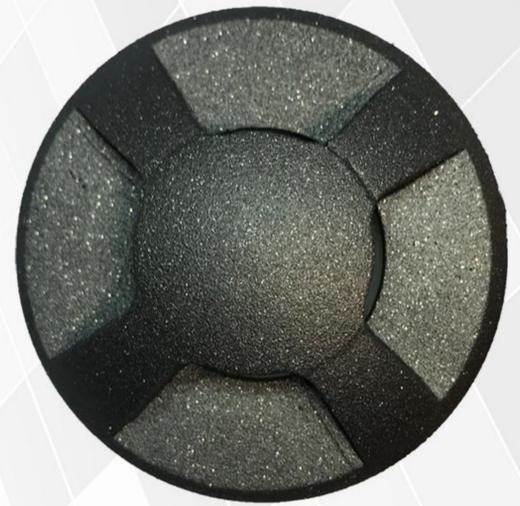

Model	Wattage	IP Rating	Body Colour	Dimensions
UHLS-BR 1 WAY	2W	IP65	BK	H - 80mm DIA - 50mm
UHLS-BR 2 WAY	2W	IP65	BK	H - 80mm DIA - 50mm
UHLS-BR 4 WAY	2W	IP65	BK	H - 80mm DIA - 50mm

# UNISER

Outdoor Series

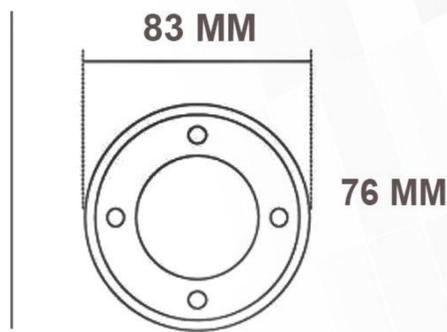


Model	Wattage	IP Rating	Body Colour
<b>UHLS-BR-1WAY</b>	<b>3W</b>	<b>IP65</b>	<b>SS FINISH</b>
<b>UHLS-BR-2WAY</b>	<b>3W</b>	<b>IP65</b>	<b>SS FINISH</b>
<b>UHLS-BR-4WAY</b>	<b>3W</b>	<b>IP65</b>	<b>SS FINISH</b>

# UNISER

Outdoor Series



IP65

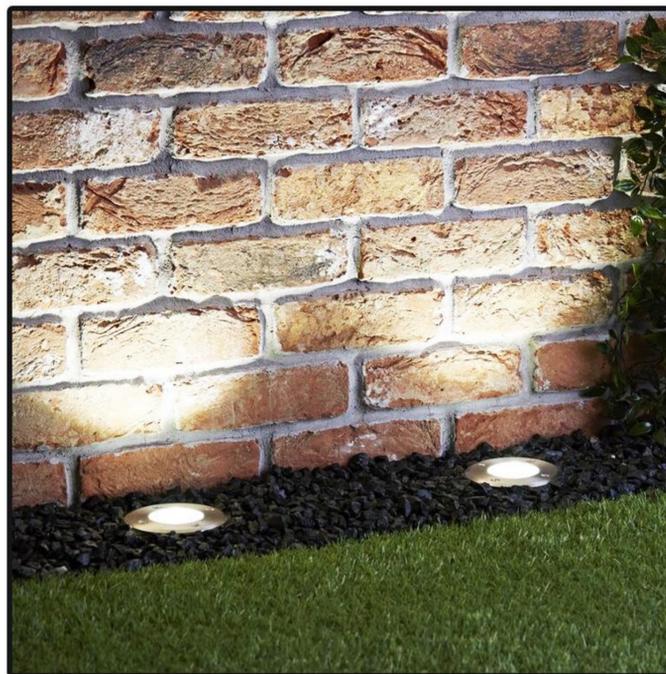


Model	Wattage	CCT	IP Rating	Body Colour
<b>UHLS-5W WALKOVER</b>	<b>5W</b>	<b>WW &amp; BLUE</b>	<b>IP65</b>	<b>SS FINISH</b>

# UNISER

Outdoor Series

POWERED BY CREE 


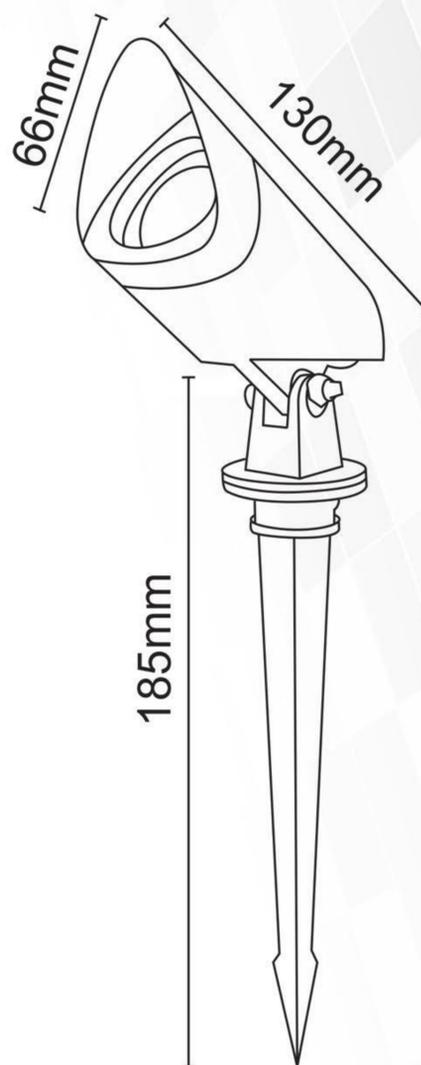


Model	Wattage	CCT	Beam Angle	CRI	Lumens	Body Color	Material
UHLS-OD-04-1404 SPIKE	04W	3000K	38°	80	440LM	BK	ALUMINIUM
UHLS-OD-07-1404 SPIKE	07W	3000K	38°	80	770LM	BK	ALUMINIUM
UHLS-OD-14-1404 SPIKE	14W	3000K	38°	80	1540LM	BK	ALUMINIUM

# UNISER

Outdoor Series

POWERED BY CREE

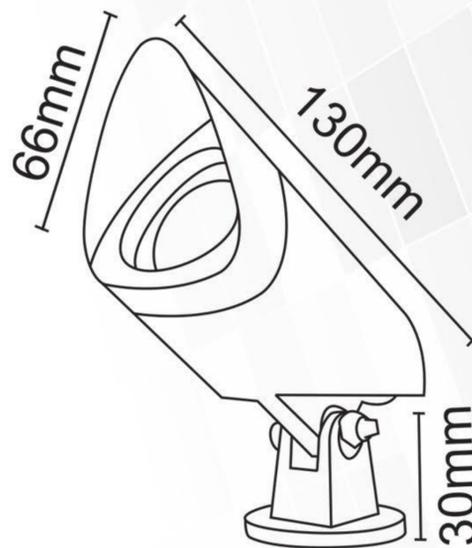
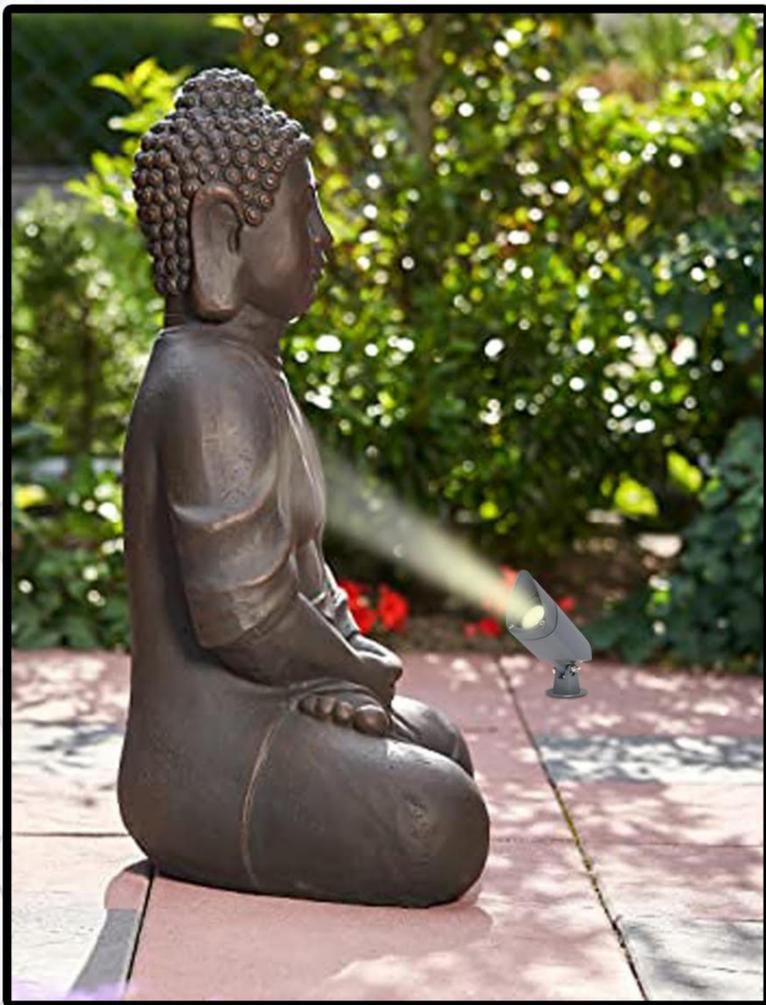


Model	Wattage	CCT	Beam Angle	CRI	Lumens	Body Color	Material
UHLS-OD-04-1404 WALL BASE	04W	3000K	38°	80	440LM	BK	ALUMINIUM
UHLS-OD-07-1404 WALL BASE	07W	3000K	38°	80	770LM	BK	ALUMINIUM
UHLS-OD-14-1404 WALL BASE	14W	3000K	38°	80	1540LM	BK	ALUMINIUM

# UNISER

Outdoor Series

POWERED BY CREE

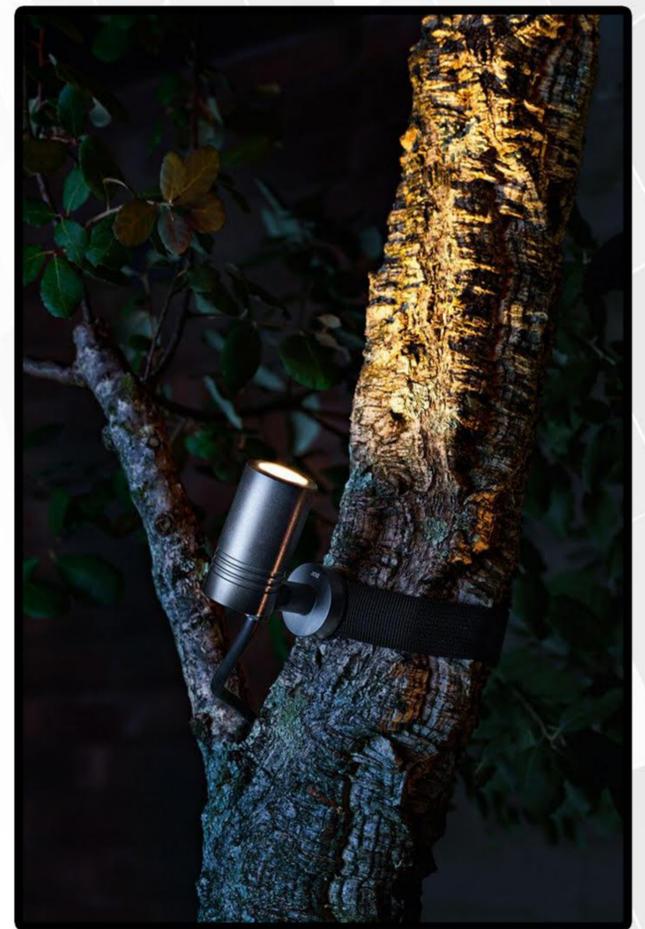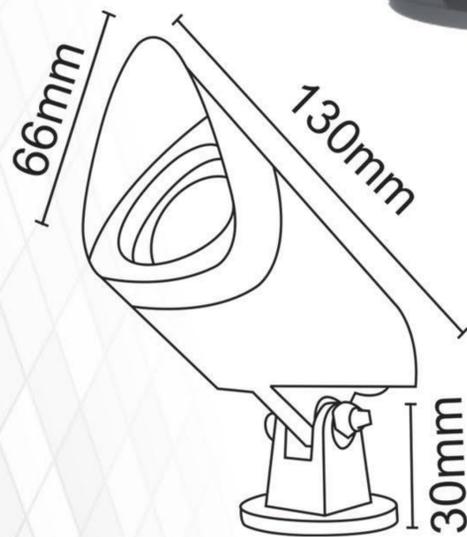

Model	Wattage	CCT	Beam Angle	CRI	Lumens	Body Color	Material
<b>UHLS-OD-04-1404 TREE STRAP</b>	<b>04W</b>	<b>3000K</b>	<b>38°</b>	<b>80</b>	<b>440LM</b>	<b>BK</b>	<b>ALUMINIUM</b>
<b>UHLS-OD-07-1404 TREE STRAP</b>	<b>07W</b>	<b>3000K</b>	<b>38°</b>	<b>80</b>	<b>770LM</b>	<b>BK</b>	<b>ALUMINIUM</b>
<b>UHLS-OD-14-1404 TREE STRAP</b>	<b>14W</b>	<b>3000K</b>	<b>38°</b>	<b>80</b>	<b>1540LM</b>	<b>BK</b>	<b>ALUMINIUM</b>

# UNISER

Outdoor Series

POWERED BY BRIDGELUX



Model

Wattage

CCT

Beam  
Angle

CRI

Lumens

Body  
Color

Material

UHLS-07- 417  
GARDEN

7W

3000K

38°

80

770LM

BK

ALUMINIUM

# UNISER

Outdoor Series

POWERED BY BRIDGELUX



Model

Wattage

CCT

Beam  
Angle

CRI

Lumens

Body  
Color

Material

UHLS-07-414  
GARDEN

07W

3000K

38°

80

770LM

BK

ALUMINIUM

# UNISER

Outdoor Series



COLOURS :

- WH
- WW
- Red
- Green
- Blue

Model	Wattage	IP Rating	Body Colour
UHLS-208	5W	IP 65	BK

# UNISER

Outdoor Series



COLOURS :

- WH
- WW
- Red
- Green
- Blue

Model	Wattage	IP Rating	Body Colour
UHLS-308	9W	IP 65	BK

Outdoor Series

# UNISER

POWERED BY **CREE** 




Model	Wattage	CCT	Body Colour	Beam Angle
UHLS-04-1404 GARDEN	4W	-3000K	GREY	-36°
UHLS-07-1404 GARDEN	7W	-3000K	GREY	-36°
UHLS-14-1404 GARDEN	14W	-3000K	GREY	-36°

Outdoor Series

# UNISER

POWERED BY CREE



Model	Power	Luminous Flux	Colour Temp	Emitting Angle	Ra	SDCM
UHLS-OD-14W Garden	14W	810 lm	3000K	23°	≥80	<4

# UNISER

Outdoor Series

POWERED BY **CREE** 

DRIVEN BY **DONE** <sup>®</sup>




Model	Wattage	CCT	Beam Angle	CRI	Lumens	Body Color	Material
UHLSOD-8-114	8W	3000K	38°	80	880LM	BK	ALUMINIUM
UHLSOD-12-114	12W	3000K	38°	80	1320LM	BK	ALUMINIUM

# UNISER

Outdoor Series

POWERED BY CREE

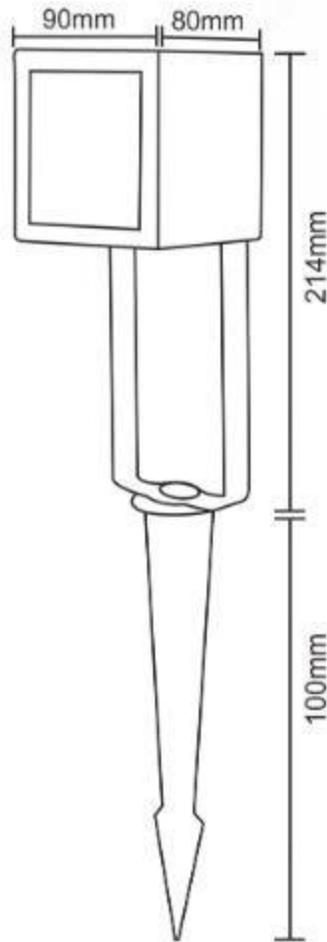

Model	Wattage	CCT	IP Rating	CRI	Lumens	Body Color	Material
UHLS- 14-3002 GARDEN LIGHT	14W	3000K	IP65	80	1540LM	BK	ALUMINIUM

Outdoor Series

# UNISER


POWERED BY CREE 



Model	Wattage	CCT	Body Colour
UHLS-025 SF/3W	3W	3K	BK/PKW

# UNISER

Outdoor Light

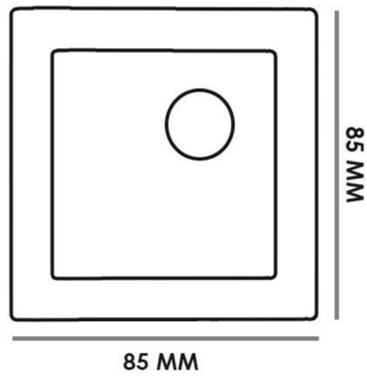

Model	Wattage	CCT	IP Rating	Body Colour	Sensor
<b>UHLS-3W-575 FOOTLIGHT</b>	<b>3W</b>	<b>3000 (WW)</b>	<b>IP65</b>	<b>BK/WH</b>	<b>MOTION &amp; DAY-NIGHT</b>

# UNISER

Outdoor Series



Model	Power	IP Rating	Body Colour
<b>UHLS-525SF/3W</b>	<b>3W</b>	<b>IP65</b>	<b>PKW/BK</b>
<b>UHLS-525SF/6W</b>	<b>6W</b>	<b>IP65</b>	<b>PKW/BK</b>

# UNISER


Outdoor Series



Model	Power	IP Rating	Body Colour
<b>UHLS-OD 201/2</b>	<b>2W</b>	<b>IP65</b>	<b>Grey</b>
<b>UHLS-OD 201/4</b>	<b>4W</b>	<b>IP65</b>	<b>Grey</b>

# UNISER


Outdoor Series

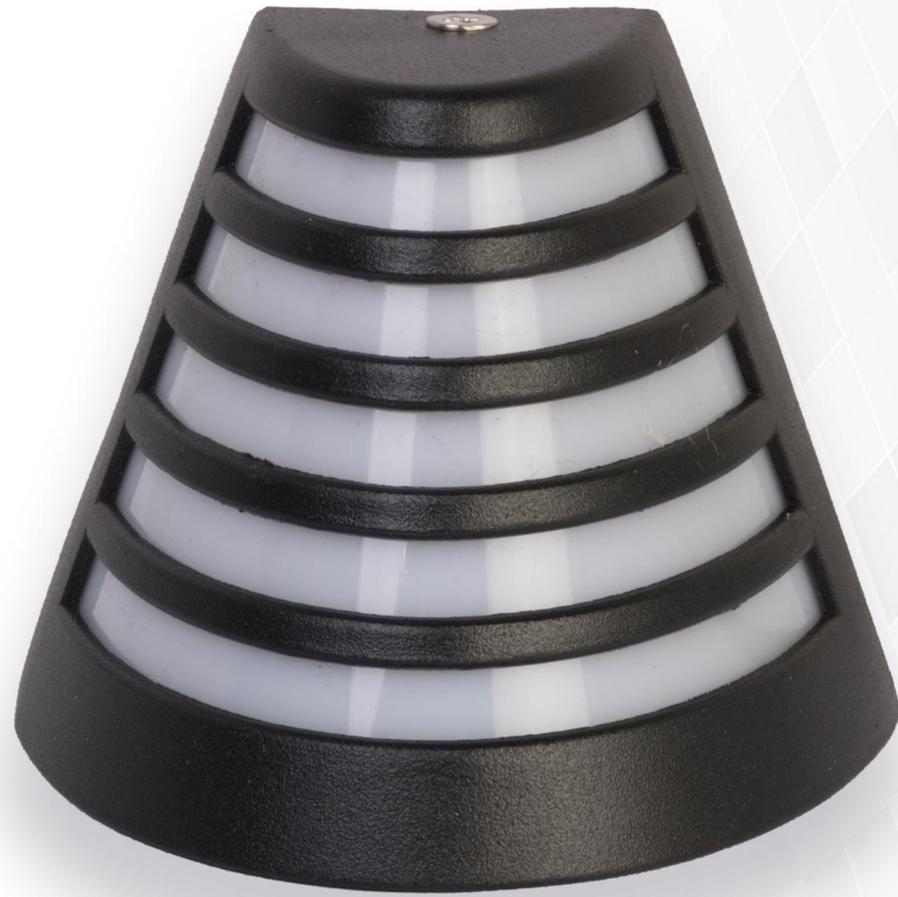

Model	Power	IP Rating	Body Colour
<b>UHLS-OD 4747</b>	<b>3W</b>	<b>IP54</b>	<b>BK</b>

Outdoor Series

# UNISER

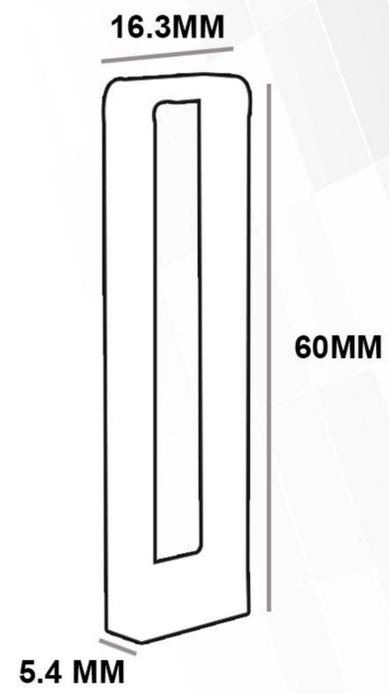

Model	IP Rating	CCT	Body Colour
UHLS-BL-3236-600	7W	3000K	BK

Outdoor Series

# UNISER

POWERED BY CREE



Model	Power	Luminous Flux	Colour Temp	Emitting Angle	Ra	SDCM
UHLS-OD-2391-600	7W	566 lm	3000K	21°	≥80	<4

Outdoor Series

# UNISER

POWERED BY  EDISON





Model	Power	Colour Temp	Body Colour	IP Rating	Chip
<b>UHLS-BL-7198</b>	<b>7W</b>	<b>3000K</b>	<b>Matte Black</b>	<b>65</b>	<b>EDISON</b>

Outdoor Series

# UNISER

POWERED BY CREE

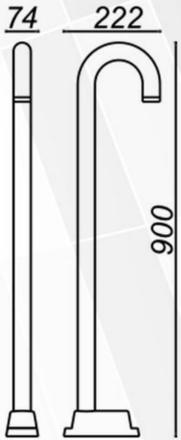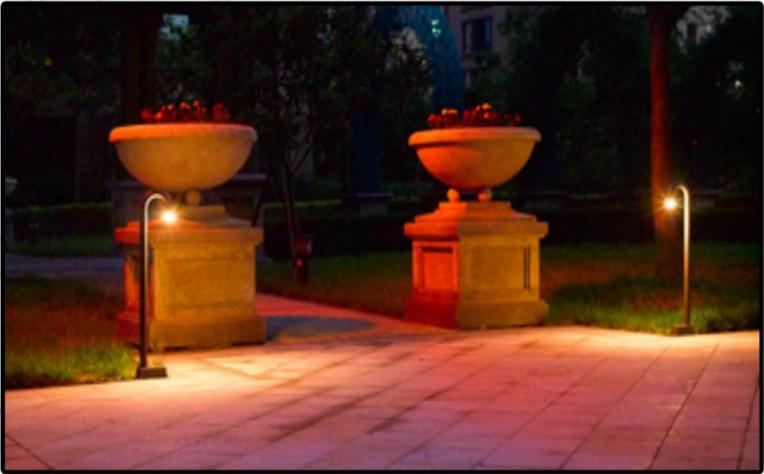

Model	Power	Luminous Flux	Colour Temp	Emitting Angle	Ra	SDCM
UHLS-OD-2211-900	7W	337 lm	3000K	99°	≥80	<4

Outdoor Series

# UNISER

POWERED BY  EDISON



Model	Power	Colour Temp	Body Colour	IP Rating	Chip
<b>UHLS-BL-1002</b>	<b>10W</b>	<b>3000K</b>	<b>Matte Black</b>	<b>65</b>	<b>EDISON</b>

Outdoor Series

# UNISER

POWERED BY  EDISON




Model	Power	Colour Temp	Body Colour	IP Rating	Chip
UHLS-BL-1003	10W	3000K	Matte Black	65	EDISON

Outdoor Series

# UNISER

POWERED BY CREE

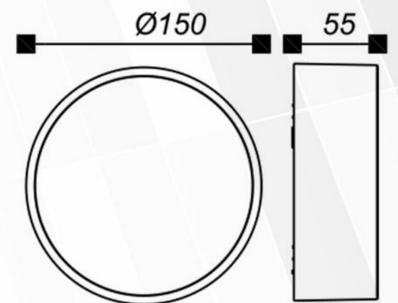

Model	Power	Luminous Flux	Colour Temp	Emitting Angle	Ra	SDCM
UHLS-OD-2171	7W	550 lm	3000K	106°	≥80	<5

# UNISER

Outdoor Series



Model	Wattage	IP Rating	Body Colour	CCT	Dimensions
UHLS-OD 201802	9W	IP 65	BK	3K	100MM (H) 110 MM (D)

# UNISER

Outdoor Series



Model	Wattage	IP Rating	Body Colour	CCT	Dimensions (h*w*l)
UHLS-OD 201803	9W	IP 65	BK	3K	100MM X 110 MM X 110MM

# UNISER

Outdoor Series

POWERED BY **EVERLIGHT**®  
SUPPORTED WITH TUV RHeinland Certified Driver



H 65MM

DIA 92MM

Model	Power	CCT	IP Rating	Body Colour	Surge Protection
<b>UHLS-OD 1745</b>	<b>12W</b>	<b>3000</b>	<b>IP65</b>	<b>BK</b>	<b>470V</b>

# UNISER

Outdoor Series

POWERED BY **EVERLIGHT**®

SUPPORTED WITH TUV RHeinland Certified Driver



H 65MM

WxL 92MM x 92mm

Model	Power	CCT	IP Rating	Body Colour	Surge Protection
UHLS-OD 1755	12W	3000	IP65	BK	470V

# UNISER

Outdoor Series

POWERED BY **CREE** 



Model	Power	IP Rating	Body Colour
<b>UHLS-14SF COB IP54</b>	<b>14W</b>	<b>IP54</b>	<b>PKW/BK</b>

# UNISER

Outdoor Series

POWERED BY **CREE** 




Model	Power	IP Rating	Body Colour
<b>UHLS-14SF SQ IP54</b>	<b>14W</b>	<b>IP54</b>	<b>PKW/BK</b>


Outdoor Series

# UNISER

POWERED BY CREE 




Model	Power	Luminous Flux	Colour Temp	Emitting Angle	Ra	SDCM
UHLS-OD-21SF COB	21W	1789 lm	3000K	46°	≥80	<4

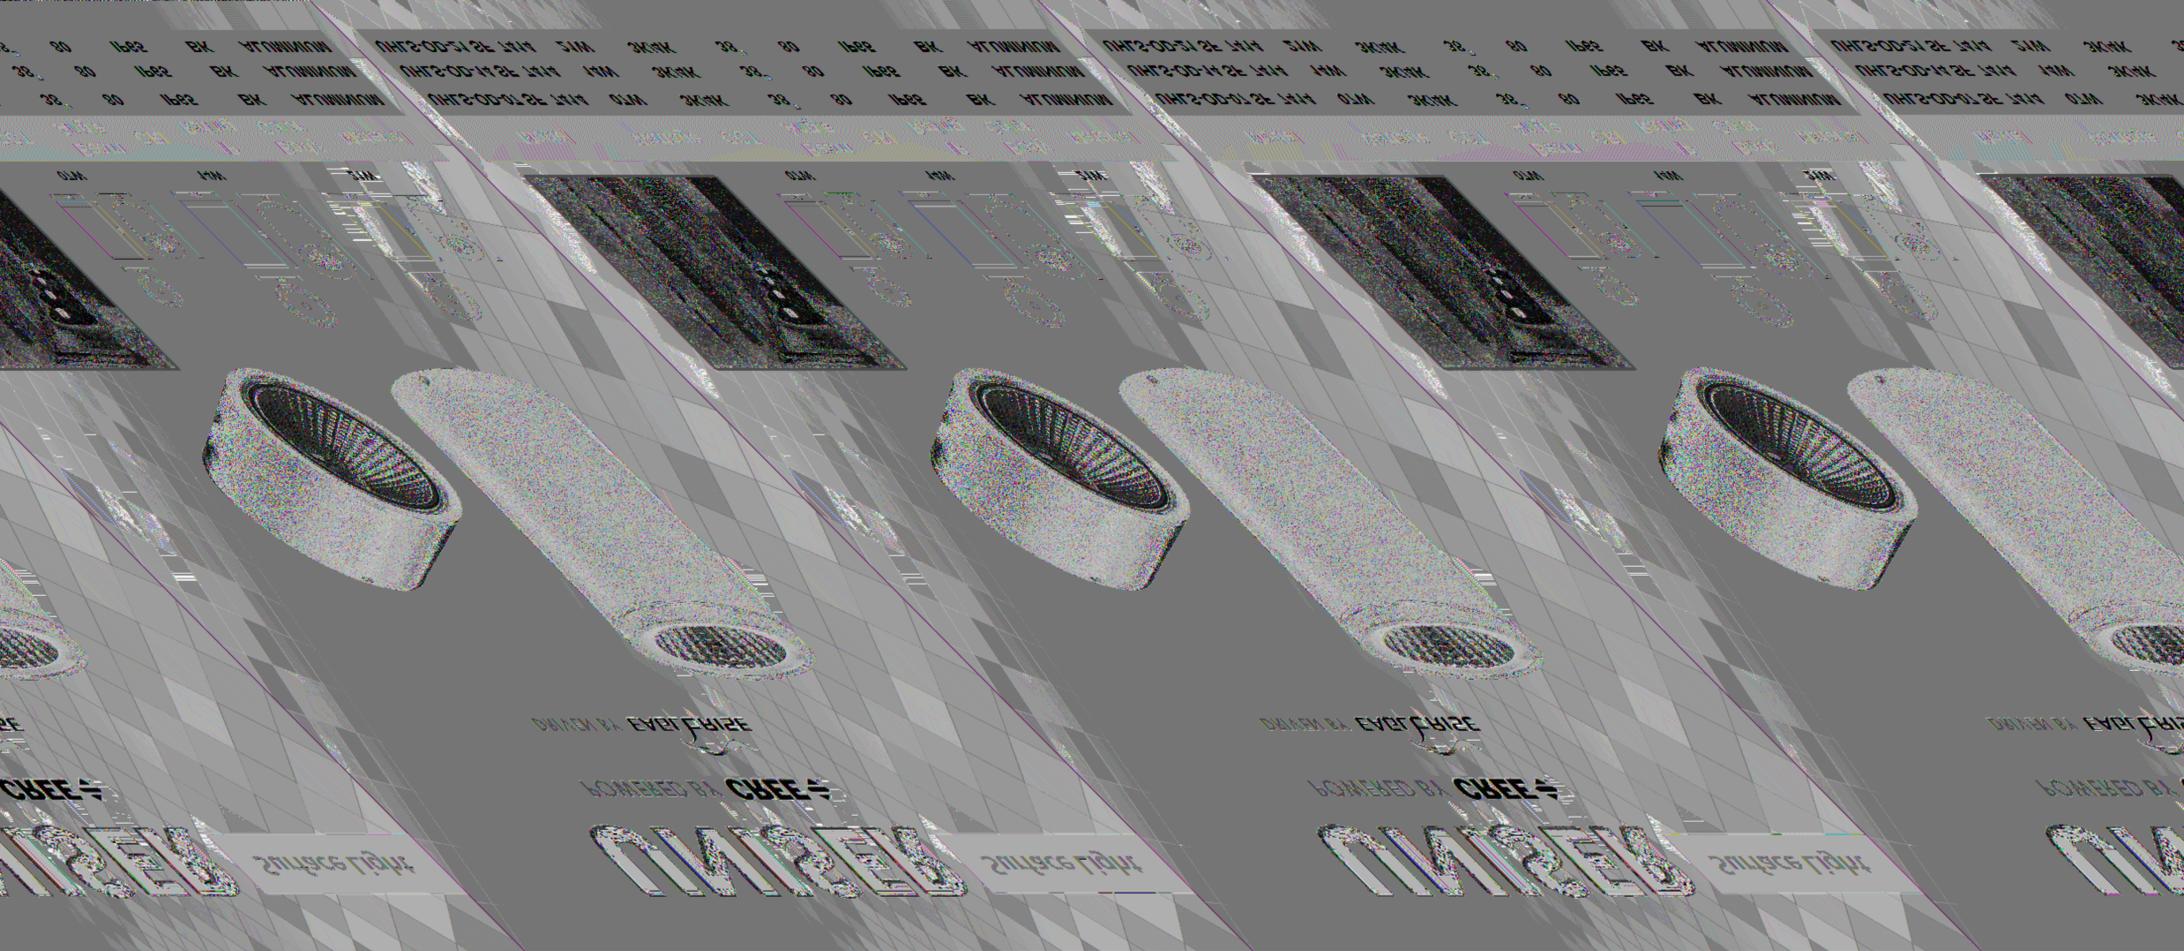

# UNISER

Outdoor Series

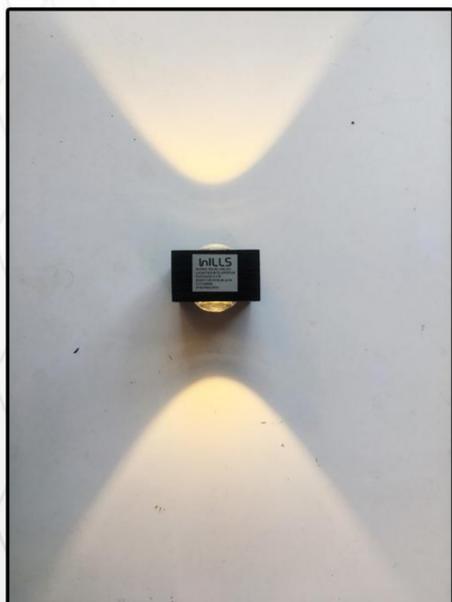

Model

Power

IP Rating

Body  
Colour

**UHLS-OD 222**

**2W**

**IP65**

**BK**

# UNISER

Outdoor Series



Model

Power

IP Rating

Body  
Colour

**UHLS-OD 2121**

**4W**


**IP65**

**BK**

# UNISER

Outdoor Series

POWERED BY CREE 

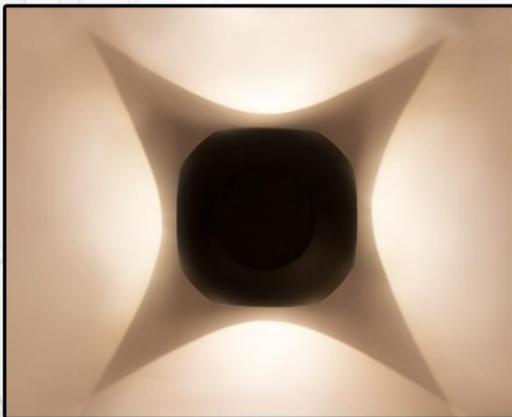

Model	Power	IP Rating	Body
UHLS-OD 3199/4	4W	IP 65	Sandy BK

# UNISER

Outdoor Series





Model	Power	CCT	Body Colour	IP Rating
<b>UHLS-OD-4WAY</b>	<b>4x3W</b>	<b>3000</b>	<b>Sand BK</b>	<b>IP65</b>

Outdoor Series

# UNISER

POWERED BY CREE

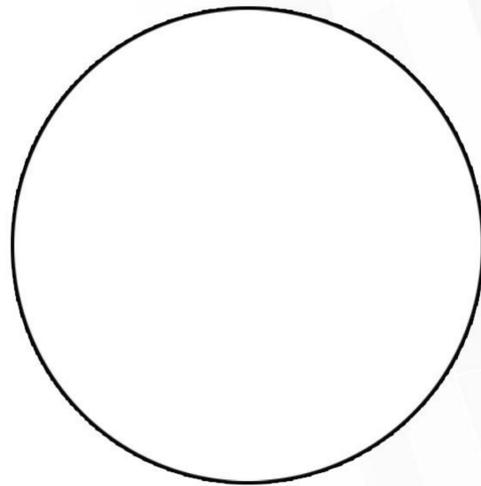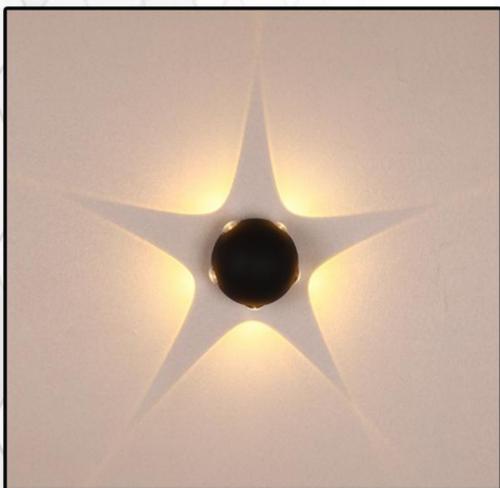


100 MM

Model	Wattage	IP Rating	Body Colour	Dimensions
UHLS-OD 5 WAY	5W	IP65	BK	DIA - 100mm

# UNISER


Outdoor Series

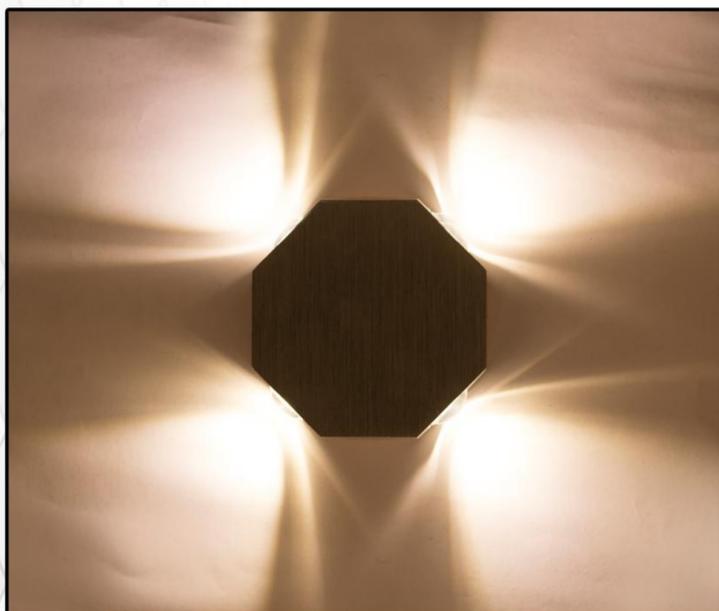

Model	Power	IP Rating	Body
<b>UHLS-OD 444</b>	<b>4W</b>	<b>IP65</b>	<b>AL FINISH</b>

# UNISER

Outdoor Series

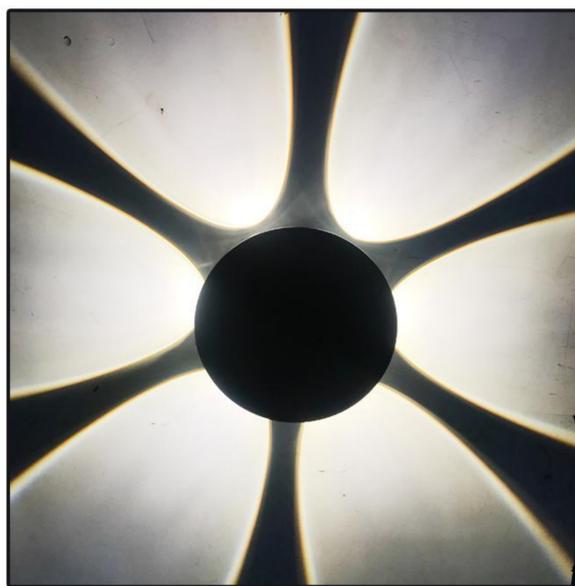


Model	Wattage	CCT	IP Rating	Body Colour
UHLS-OD 3199-6	6W	3000K	IP65	BK

Outdoor Series

# UNISER


POWERED BY **CREE** 

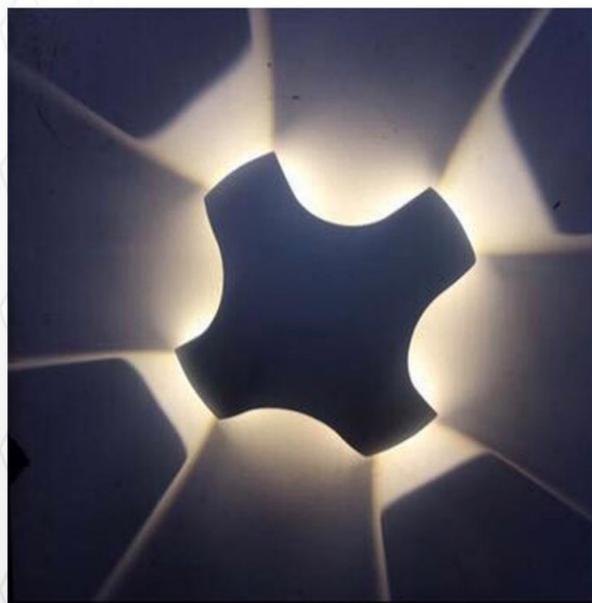

Model	Power	IP Rating	Body Colour
<b>UHLS-OD 1019</b>	<b>12W</b>	<b>IP65</b>	<b>PKW/BK</b>

# UNISER

Outdoor Series

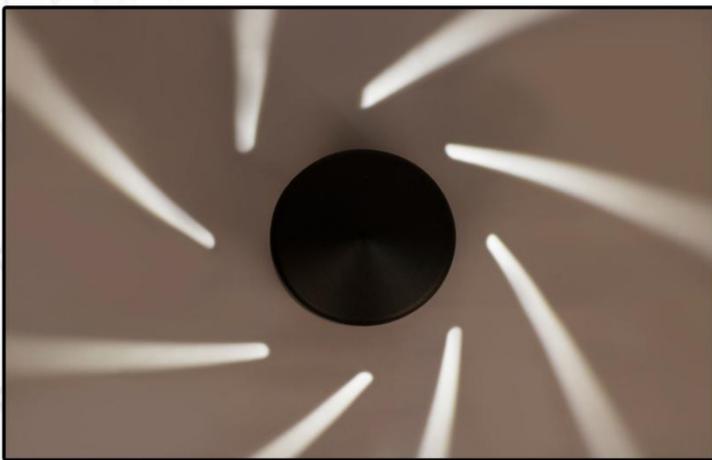


Model	Power	IP Rating	Body Colour
<b>UHLS-OD 1414</b>	<b>7W</b>	<b>IP54</b>	<b>BK</b>

Outdoor Series

# UNISER


POWERED BY  EDISON

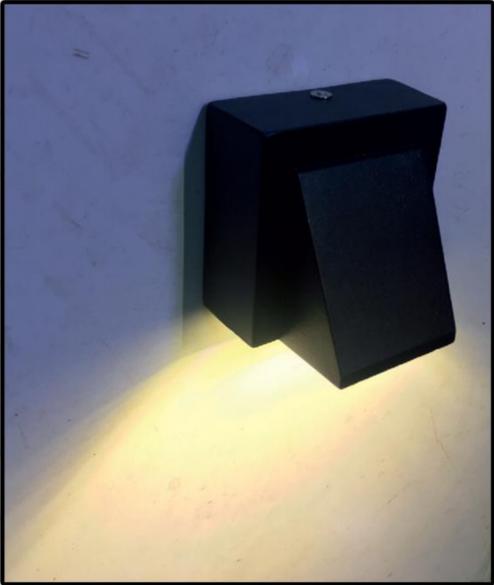

Model	Power	Colour Temp	Body Colour	IP Rating	Chip
<b>UHLS-OD-786UP</b>	<b>3W</b>	<b>3000K</b>	<b>Matte Black</b>	<b>65</b>	<b>EDISON</b>

# UNISER

Outdoor Series

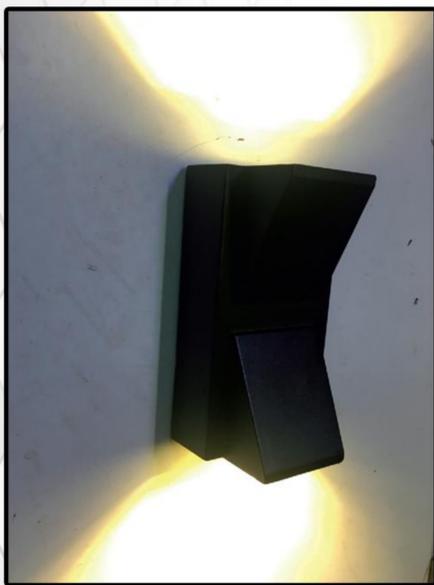


Model	Power	Colour Temp	Body Colour	IP Rating	Chip
<b>UHLS-OD-786 2x3</b>	<b>2x3W</b>	<b>3000K</b>	<b>Matte Black</b>	<b>65</b>	<b>EPISTAR</b>

# UNISER

Outdoor Series

POWERED BY  EDISON

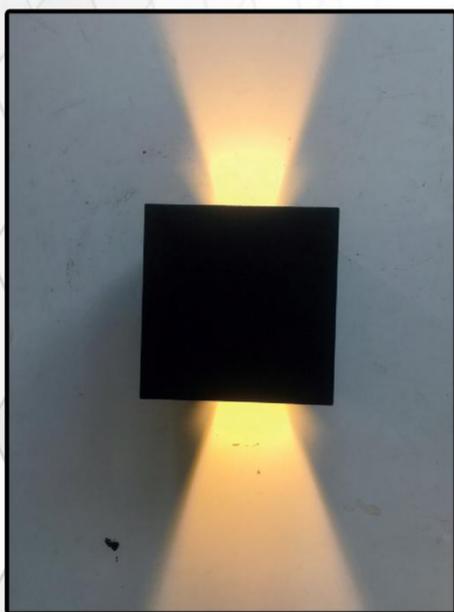

Model	Power	Colour Temp	Body Colour	IP Rating	Chip
<b>UHLS-OD-2711</b>	<b>2x5W</b>	<b>3000K</b>	<b>Matte Black</b>	<b>65</b>	<b>EDISON</b>

# UNISER

Outdoor Series




Model	Power	IP Rating	Body Colour
<b>UHLS-OD 111 MOV 7W</b>		<b>IP65</b>	<b>BK</b>

# UNISER

Outdoor Series

POWERED BY  EDISON

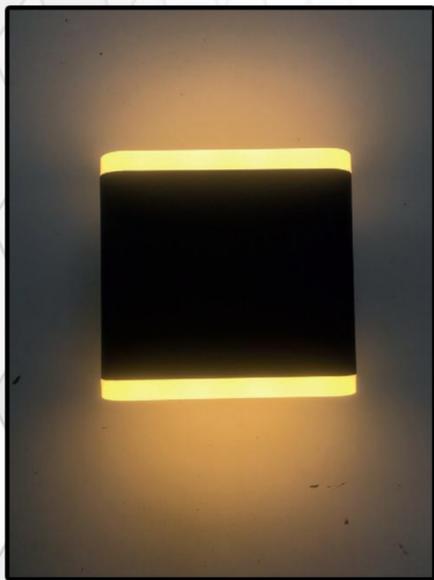


Model	Power	Colour Temp	Body Colour	IP Rating	Chip
<b>UHLS-OD-1005S</b>	<b>2x3W</b>	<b>3000K</b>	<b>Matte Black</b>	<b>65</b>	<b>EDISON</b>

Outdoor Series

# UNISER

POWERED BY  EDISON

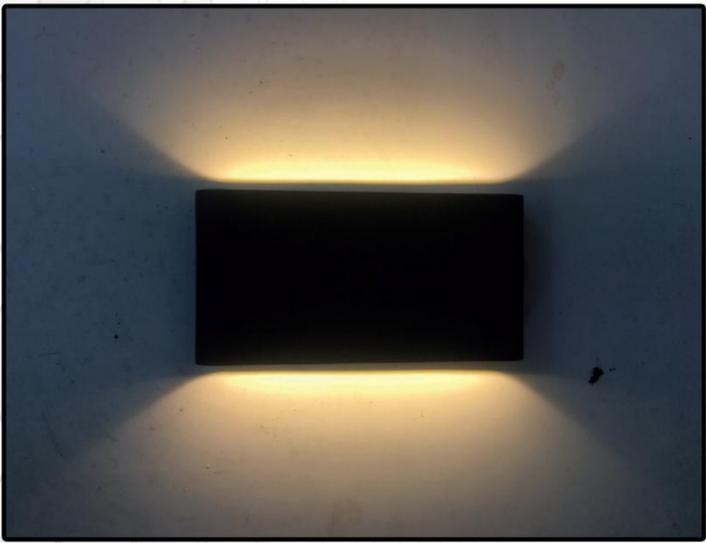


Model	Power	Colour Temp	Body Colour	IP Rating	Chip
UHLS-OD-6266L	2x4W	3000K	Matte Black	65	EDISON

Outdoor Series

# UNISER

POWERED BY EVERLIGHT®

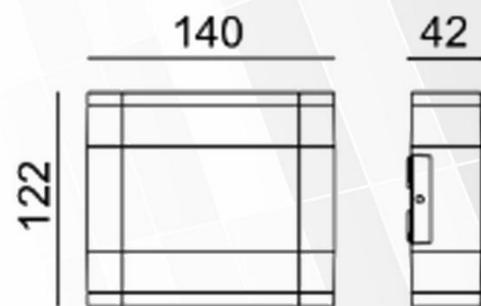

Model	Wattage	IP Rating	Body Colour	CCT	Beam Angle
UHLS-OD 5381	9W	IP 54	BK	3K	110°

# UNISER

Outdoor Series

POWERED BY  EDISON




Model	Power	Colour Temp	Body Colour	IP Rating	Chip
<b>UHLS-OD-1006</b>	<b>2x4W</b>	<b>3000K</b>	<b>Matte Black</b>	<b>65</b>	<b>EDISON</b>

# UNISER

Outdoor Series

POWERED BY  EDISON

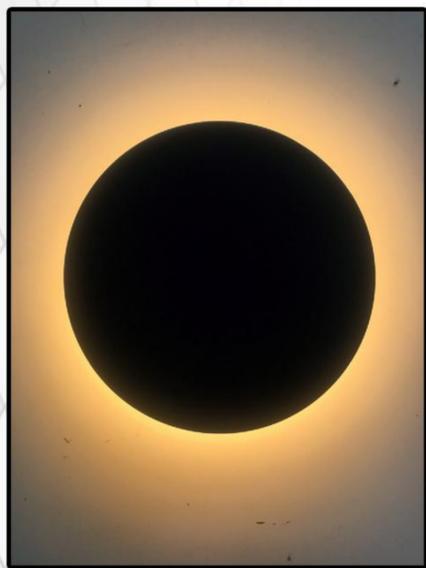

Model	Power	Colour Temp	Body Colour	IP Rating	Chip
<b>UHLS-OD-1002</b>	<b>10W</b>	<b>3000K</b>	<b>Matte Black</b>	<b>65</b>	<b>EDISON</b>

# UNISER



Outdoor Series



Model	Power	IP Rating	Body
UHLS-OD 322B	6W	IP 65	Sandy BK

# UNISER

Outdoor Series

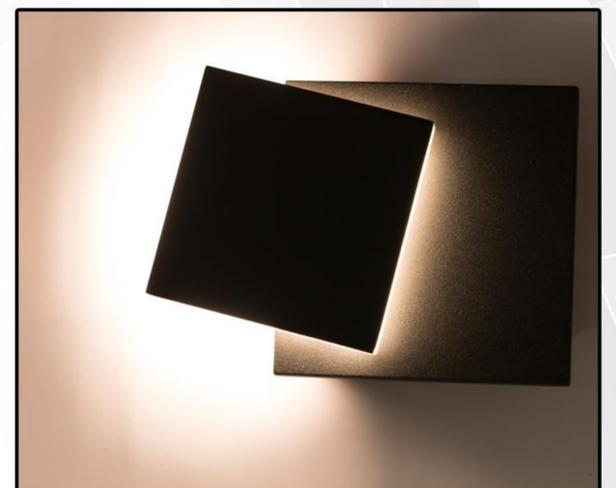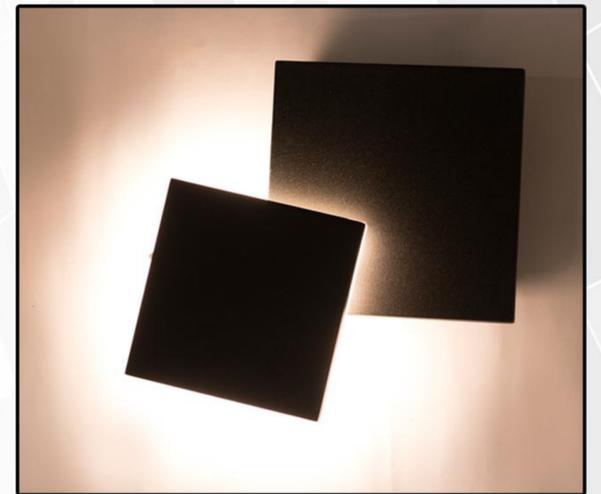

Model

Power

IP Rating

Body

**UHLS-OD 2005**

**10W**


**IP 65**

**Sandy BK**

Outdoor Series

# UNISER

POWERED BY CREE

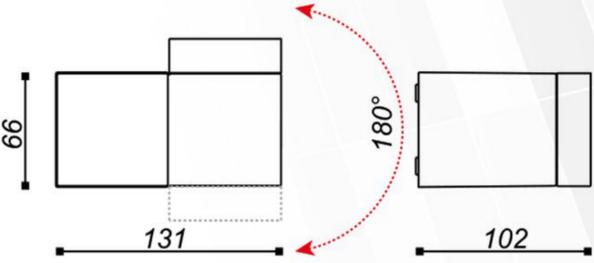


Model	Power	Luminous Flux	Colour Temp	Emitting Angle	Ra	SDCM
UHLS-OD-1861	4W	249 lm	3000K	25°	≥80	<6


# UNISER

Outdoor Series


POWERED BY CREE

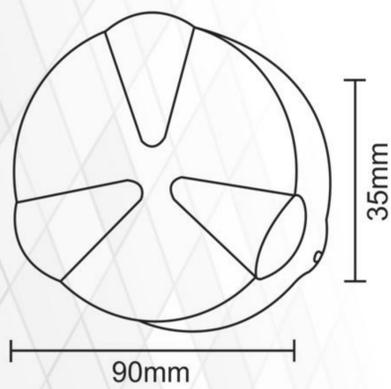

**3W**

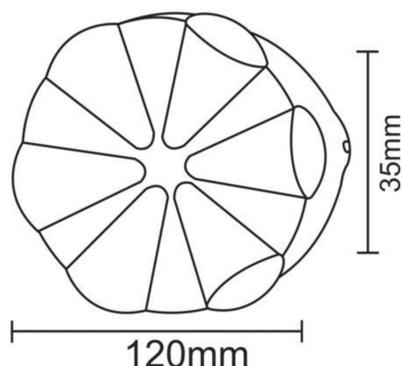

**6W**


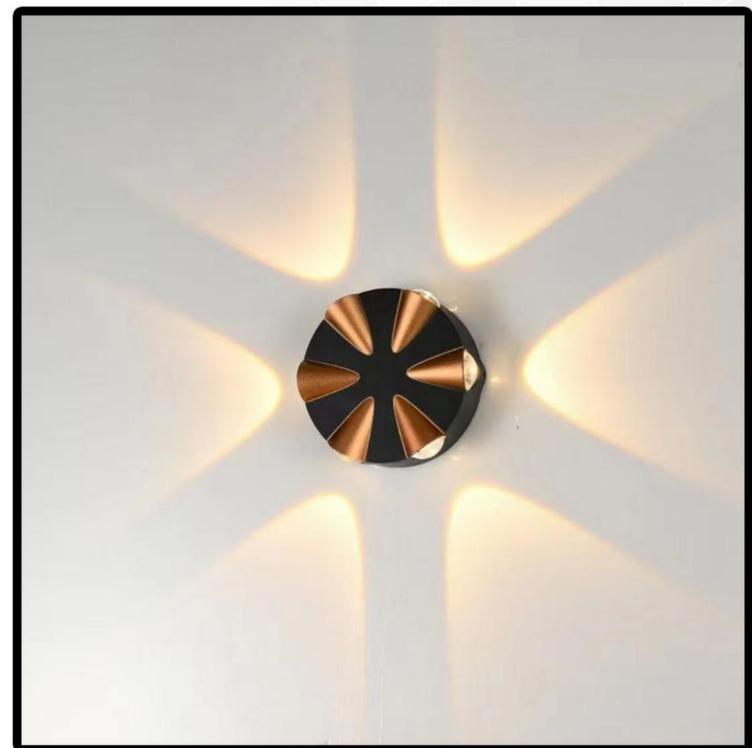


Model	Wattage	CCT	IP Rating	PF	CRI	Body Color	Material
<b>UHLS-OD 773</b>	<b>03W</b>	<b>3000K</b>	<b>IP54</b>	<b>&gt; 0.9</b>	<b>80</b>	<b>BK+GOLD</b>	<b>ALUMINIUM</b>
<b>UHLS-OD 776</b>	<b>06W</b>	<b>3000K</b>	<b>IP54</b>	<b>&gt; 0.9</b>	<b>80</b>	<b>BK+GOLD</b>	<b>ALUMINIUM</b>

# UNISER

Recessed Series

POWERED BY  EDISON

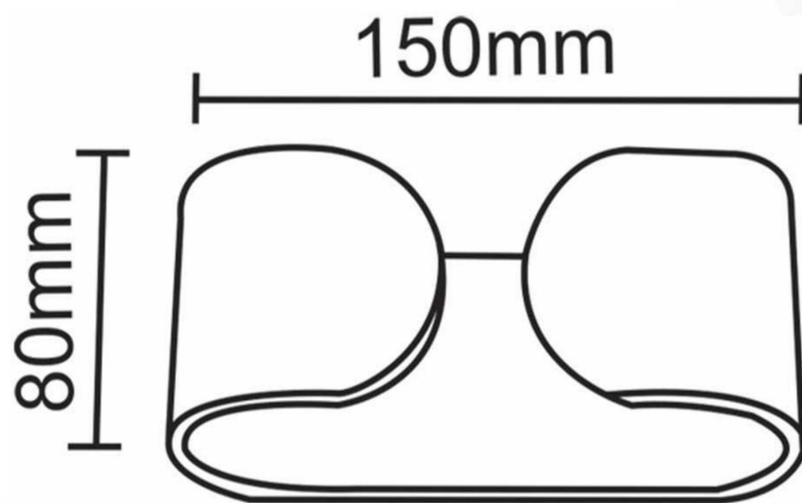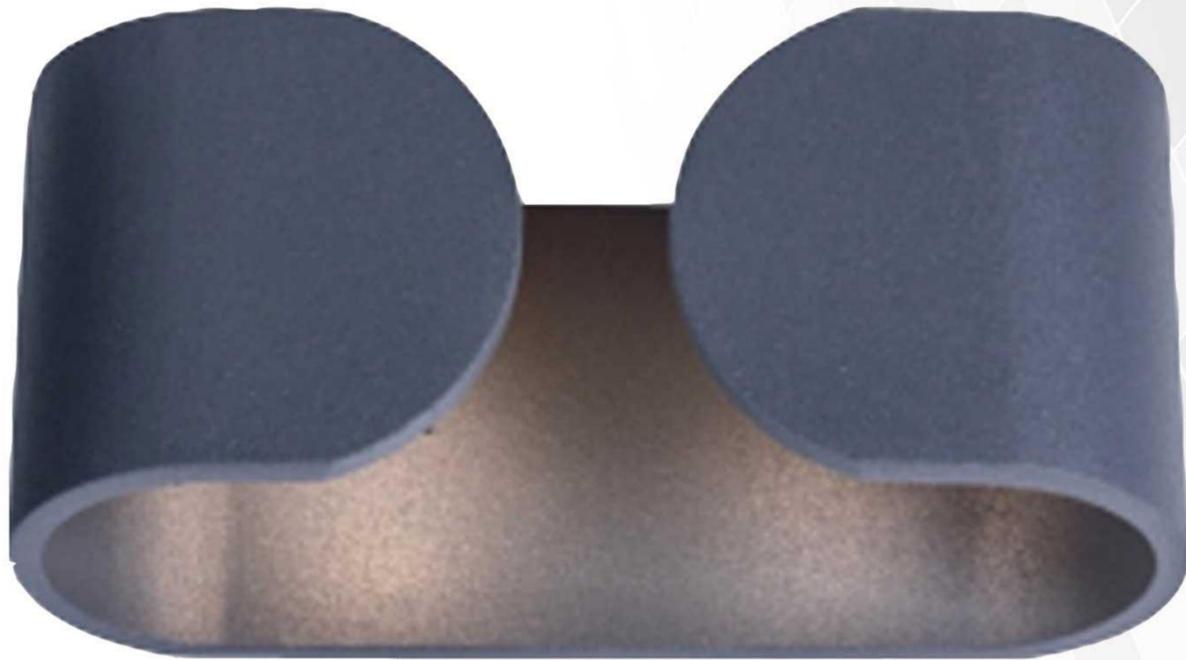

Model	Wattage	CCT	Body Color	IP Rating	Chip
UHLS-OD-6283	2X3W	3000K	Matte Black	65	EDISON

Outdoor Light

# UNISER



Model	Wattage	CCT	Body Colour	IP Rating
<b>UHLS-OD 495/1X4</b>	<b>4W</b>	<b>3000K</b>	<b>BK</b>	<b>IP65</b>
<b>UHLS-OD 495/2X4</b>	<b>8W</b>	<b>3000K</b>	<b>BK</b>	<b>IP65</b>

# UNISER

Outdoor Series



COLOURS :



Model	Wattage	IP Rating	Body Colour
<b>UHLS-259 UPDOWN</b>	<b>2x5W</b>	<b>IP 65</b>	<b>BK</b>
<b>UHLS-259 UPDOWN</b>	<b>2x9W</b>	<b>IP 65</b>	<b>BK</b>

# UNISER

Outdoor Series




Model	Power	CCT	Body Colour
UHLS-OD 888	8W	3K/4K/6K	BK

Outdoor Series

# UNISER

POWERED BY  EDISON


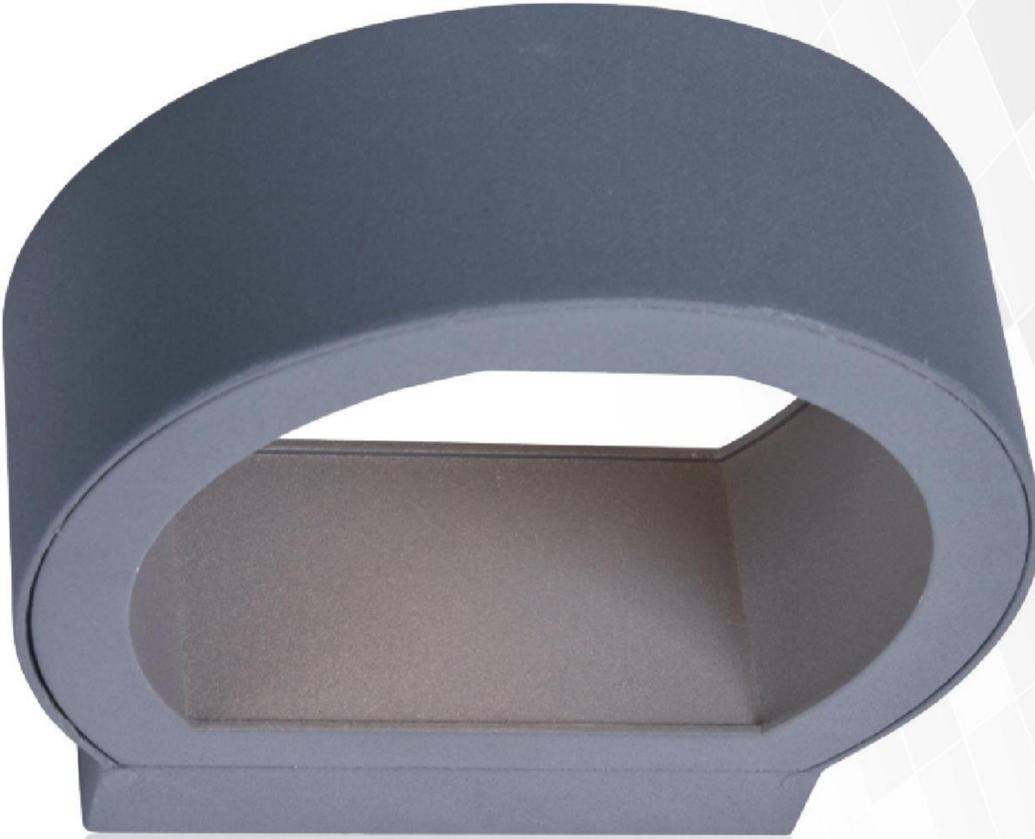


Model	Power	Colour Temp	Body Colour	IP Rating	Chip
UHLS-OD-6268	7W	3000K	Matte Black	65	EDISON

Outdoor Series

# UNISER

POWERED BY EVERLIGHT®


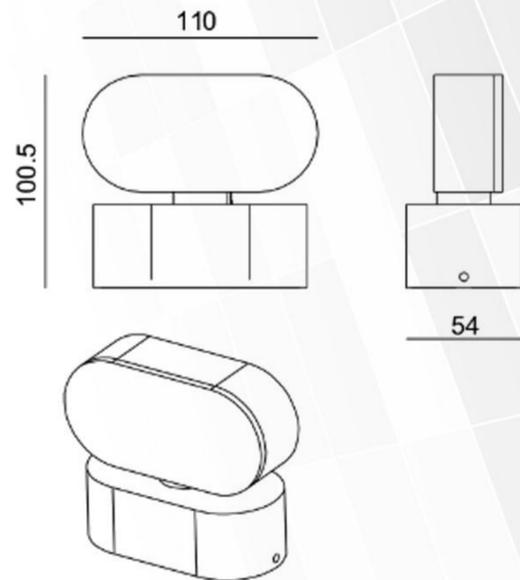
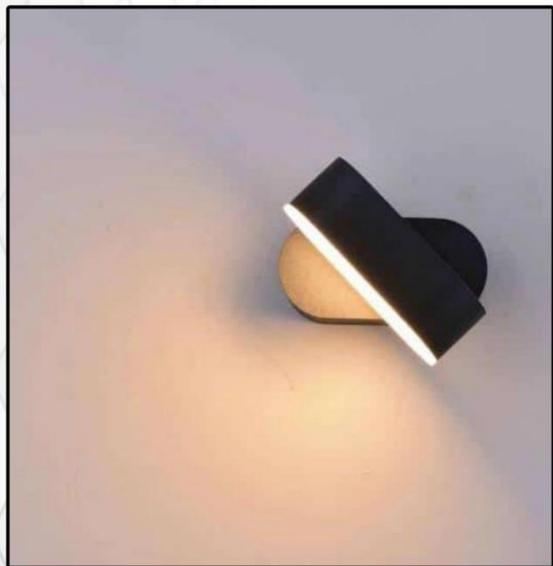


Model	Wattage	IP Rating	Body Colour	CCT
UHLS-OD 1861	7W	IP 54	BK	3K

Outdoor Series

# UNISER

POWERED BY CREE 

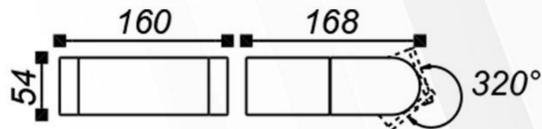



Model	Power	Luminous Flux	Colour Temp	Emitting Angle	Ra	SDCM
UHLS-OD-1901	7W	404 lm	3000K	111°	≥80	<5

Outdoor Series

# UNISER

POWERED BY CREE 

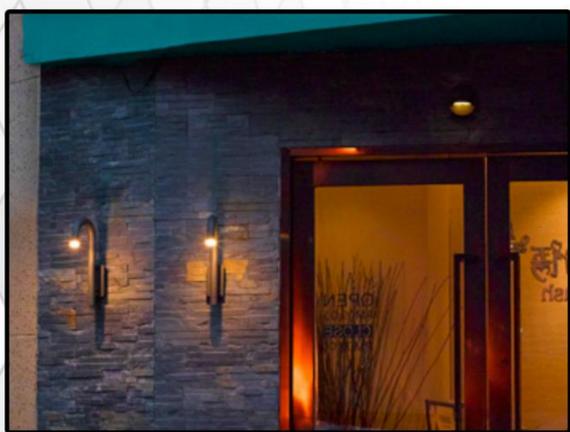


Model	Power	Luminous Flux	Colour Temp	Emitting Angle	Ra	SDCM
UHLS-OD-2211	14W	337 lm	3000K	99°	≥80	<4

Outdoor Series

# UNISER

POWERED BY CREE 




Model	Power	Luminous Flux	Colour Temp	Emitting Angle	Ra	SDCM
UHLS-OD-2212	7W	162 lm	3000K	58°	≥80	<4


Outdoor Series

# UNISER

POWERED BY CREE 

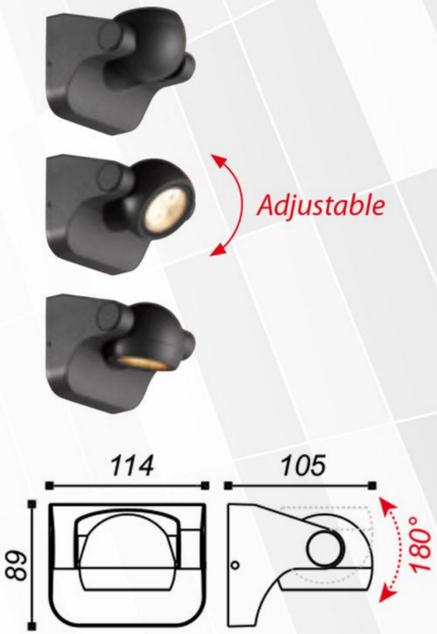

Model	Power	Luminous Flux	Colour Temp	Emitting Angle	Ra	SDCM
UHLS-OD-07-2042	7W	327 lm	3000K	26°	≥80	<6

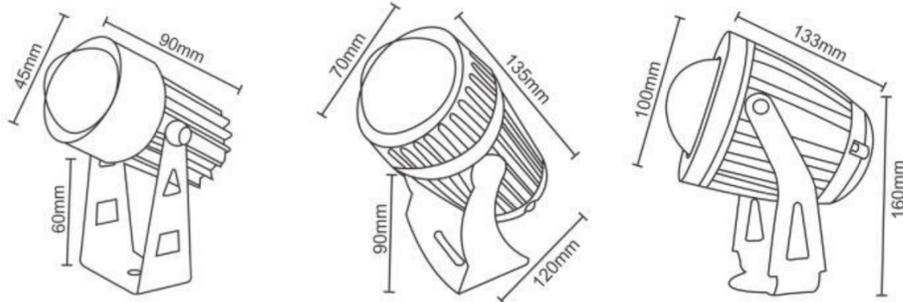

### PRODUCT SPECIFICATIONS

**Product Type :** Outdoor Series

**IP Rating :** IP65

**Product Name :** Outdoor Pillar Highlighter

**CRI :** 80

**Product Code :** UHLS-04-12-18-OD-PL

**THD :** <15

**Wattage :** 04W / 12W / 18W

**Operating Temperature:** -10°C to +60°C

**CCT :** 3000K

**Material :** Aluminium

**Body Color :** Black

**Beam Angle :** 8°

**Input Voltage :** 185-265V

**Lumens :** 440LM


**PF :** >0.9

**LED :** Osram / CREE / Bridgelux

### DRIVER OPTIONS





### SPECIAL ADDITIONAL FEATURES

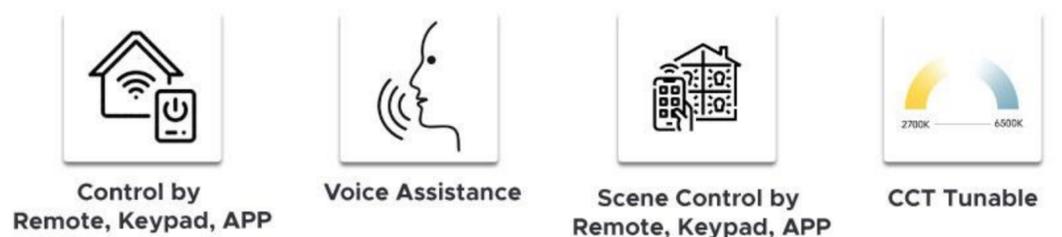

# UNISER


Outdoor Series

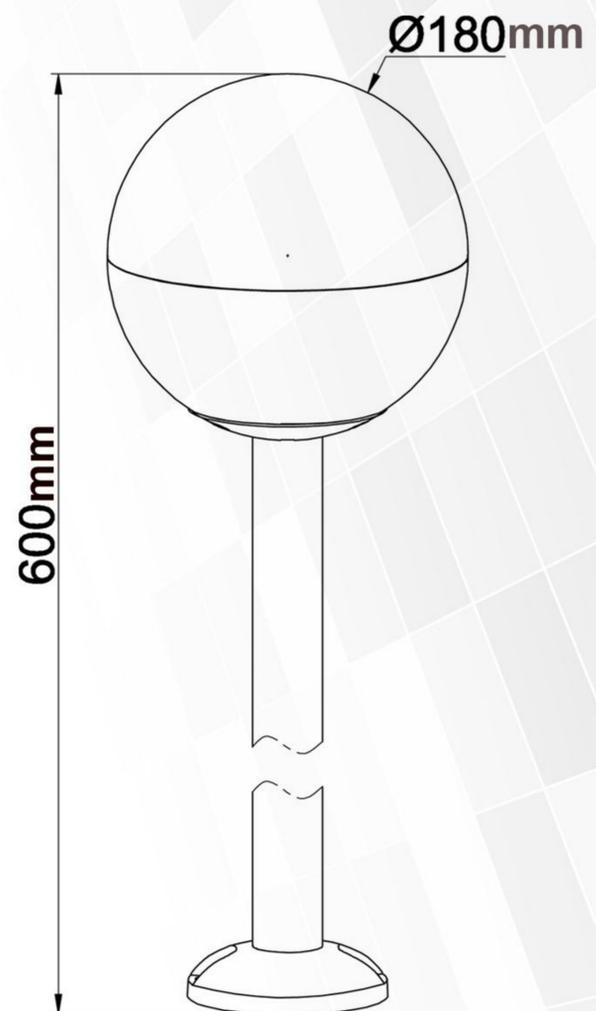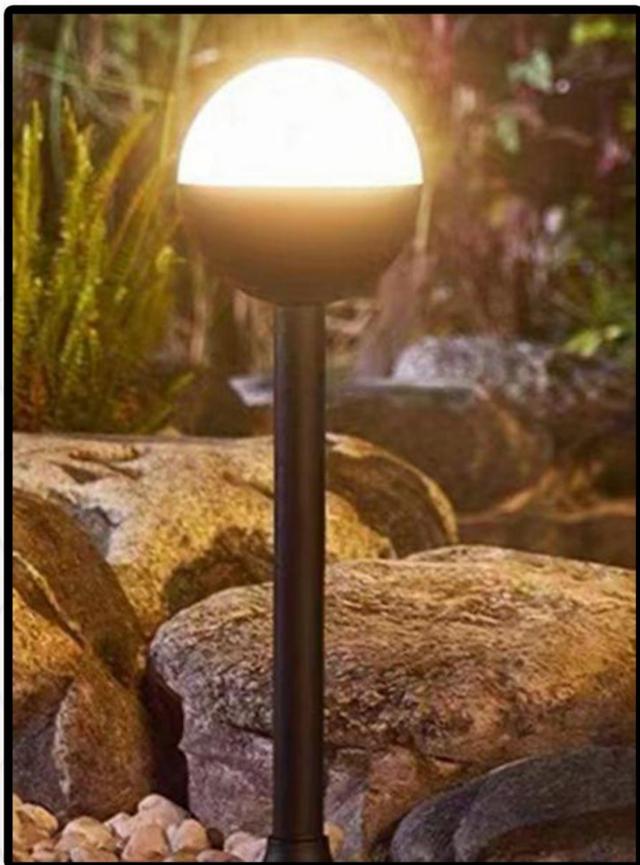

Model	Wattage	CCT	IP Rating	Holder	Body Color	Material
<b>UHLS-BL-744</b>	<b>12W</b>	<b>3K/4k/6k</b>	<b>IP65</b>	<b>E27</b>	<b>BK</b>	<b>ALUMINIUM</b>

# UNISER


Outdoor Series

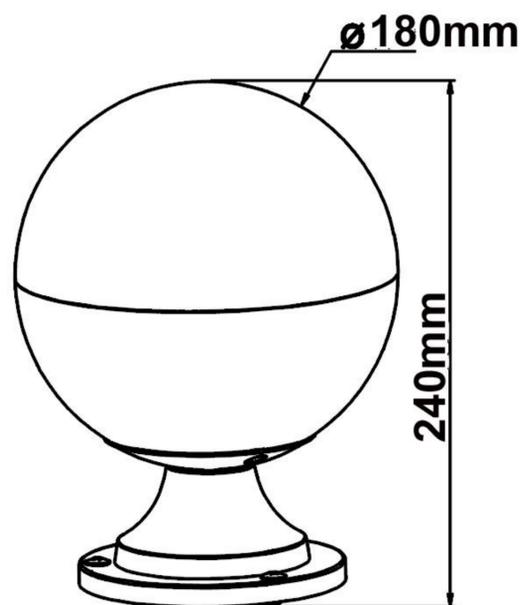

Model	Wattage	CCT	IP Rating	Holder	Body Color	Material
UHLS-WL 744	12W	3K/4k/6k	IP65	E27	BK	ALUMINIUM

# UNISER

Outdoor Series

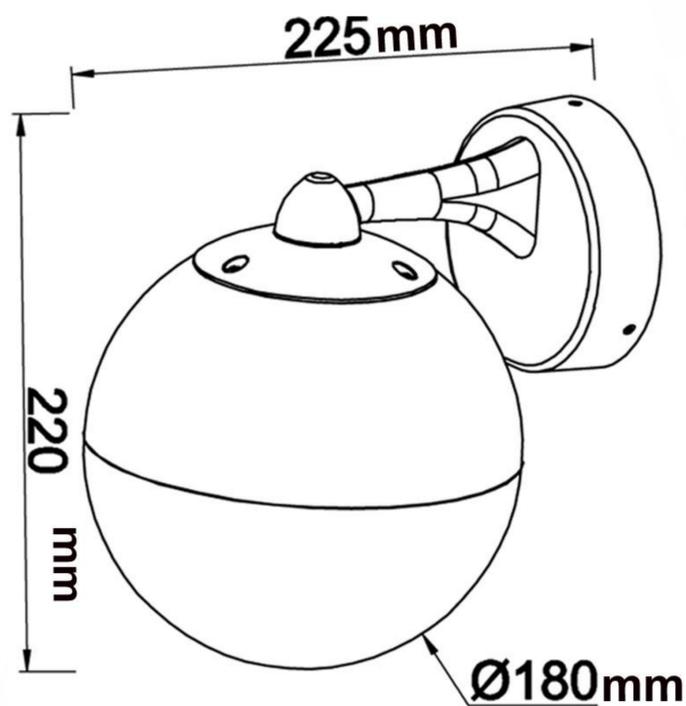

Model	Wattage	CCT	IP Rating	Holder	Body Color	Material
<b>UHLS-GL-744</b>	<b>12W</b>	<b>3K/4k/6k</b>	<b>IP65</b>	<b>E27</b>	<b>BK</b>	<b>ALUMINIUM</b>

# UNISER

Flood Light



Model	Power	Surge Protection	IP Rating	Body Colour
UHLS-35 FLOOD LIGHT	35W	4KV	IP65	WH/WW
UHLS-60 FLOOD LIGHT	60W	4KV	IP65	WH/WW
UHLS-120 FLOOD LIGHT	120W	4KV	IP65	WH/WW
UHLS-180 FLOOD LIGHT	180W	4KV	IP65	WH/WW
UHLS-240 FLOOD LIGHT	240W	4KV	IP65	WH/WW

Street Light

# UNISER





Model	Power	CCT	Surge Protection	IP Rating
<b>UHLS-35 Street Light</b>	<b>35W</b>	<b>3K/6K</b>	<b>- 4KV</b>	<b>IP 65</b>
<b>UHLS-60 Street Light</b>	<b>60W</b>	<b>3K/6K</b>	<b>- 4KV</b>	<b>IP 65</b>

# UNISER




## Floodlight Series





**25W**




**50W**



**100W**





**150W**




Model	Power	CCT	PF	Body Colour
US-FLD-25	25W	WW, DW, CW	> 0.9	BLACK
US-FLD-50	50W	WW, DW, CW	> 0.9	BLACK
US-FLD-100	100W	WW, DW, CW	> 0.9	BLACK
US-FLD-150	150W	WW, DW, CW	> 0.9	BLACK

# UNISER


## Streetlight Series

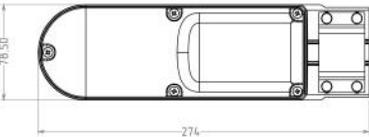


**20W**

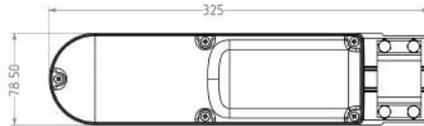



**30W**



Suitable for ø 45 OD Pipe



**60W**



Suitable for ø 50 OD Pipe

Model	Power	CCT	PF	Body Colour
US-SL-BOAT-20	20W	WW, DW, CW	> 0.9	BLACK
US-SL-BOAT-30	30W	WW, DW, CW	> 0.9	BLACK
US-SL-BOAT-60	60W	WW, DW, CW	> 0.9	BLACK

# UNISER


## Streetlight Series



Directly goes in to  
Street Light Pipe Entry

**POLE BRACKET**

Suitable for  
Max.  $\varnothing 32$ mm bore Pipe  
-  $\varnothing 43$ mm OD  
( $\varnothing 1.25$ " G.I. Pipe)

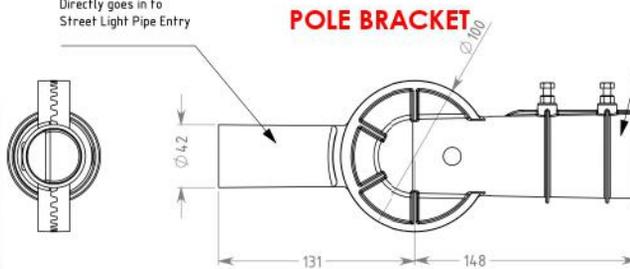


Suitable for  
Max.  $\varnothing 32$ mm bore Pipe  
-  $\varnothing 43$ mm OD  
( $\varnothing 1.25$ " G.I. Pipe)

ROTATING ARM


$\varnothing 42$

Directly goes in to  
Street Light Pipe Entry

ROTATING ARM

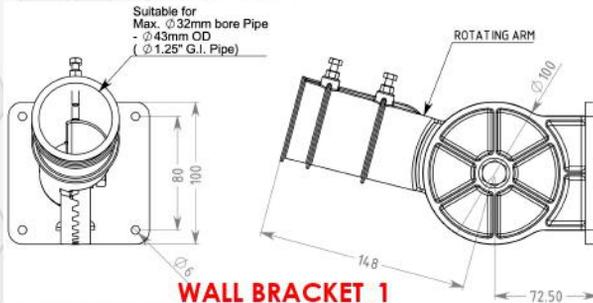

**WALL BRACKET\_1**

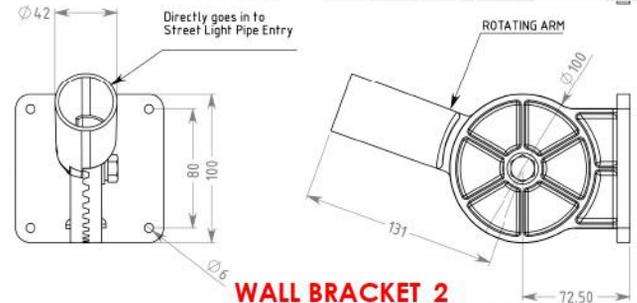

**WALL BRACKET\_2**

Model	Power	CCT	PF	Body Colour
US-SL-BOAT-POLE-BRACKET	-	-	> 0.9	BLACK
US-SL-BOAT-WALL-BRACKET_1	-	-	> 0.9	BLACK
US-SL-BOAT-WALL-BRACKET_2	-	-	> 0.9	BLACK

THINK LED, THINK UNISER

# UNISER

## INDUSTRIES PVT. LTD.

Solar Power | LED Lighting | Automation

To place your order, please contact us

### HELPDESK DETAILS:

414, Lotus House, 33-A, V Thackersey Marg, New Marine Lines,  
Mumbai-400020, India

+91-22-22000515 | 35114465  +91 9867625686

 [projects@uniserledlights.com](mailto:projects@uniserledlights.com) | [support@uniserledlights.com](mailto:support@uniserledlights.com)